

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-5A
	2
	120 L/min.
	350 bar
	0,4 - 3,2 mm
	28,6 mm
	61 - 68 Nm
Seal kit - Cartridge	Buna: 990-203-007
Seal kit - Cartridge	Viton: 990-203-006
Seal kit - Cartridge	Buna: 990-203-007
Seal kit - Cartridge	Viton: 990-203-006


# OPTION SELECTION EXAMPLE: CNFCXCN

	(X)	(C)	(N)	MATERIAL/COATING
X	C	30psi 2 bar .016 - .127 in. (0.4 - 3.2 mm)	N	Standard Material/Coating
	A	4 psi 0.3 bar .016 - .127 in. (0.4 - 3.2 mm)	V	/AP
	B	15psi 1 bar .016 - .127 in. (0.4 - 3.2 mm)		/LH -
	D	50 psi 3.5 bar .016 - .127 in. (0.4 - 3.2 mm)		
	E	75 psi 5 bar .016 - .127 in. (0.4 - 3.2 mm)		
	F	100 psi 7bar .016 - .127 in. (0.4 - 3.2 mm)		

## TECHNICAL FEATURES

- 
- 1 2 5000psi 350bar
- 2 1
- 
- 
- "AP"
- Sun

## PERFORMANCE CURVES

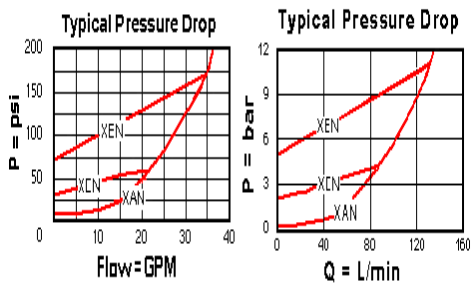

Note: Performance data shown reflects a blocked orifice.