

1 2 2 1

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-16A
	3
	240 L/min.
	350 bar
	0,4 - 6,4 mm
	31,8 mm
	203 - 217 Nm
Seal kit - Cartridge	Buna: 990-016-007
Seal kit - Cartridge	EPDM: 990-016-014
Seal kit - Cartridge	Polyurethane: 990-016-002
Seal kit - Cartridge	Viton: 990-016-006
Seal kit - Cartridge	Buna: 990-016-007
Seal kit - Cartridge	EPDM: 990-016-014
Seal kit - Cartridge	Polyurethane: 990-016-002
Seal kit - Cartridge	Viton: 990-016-006


OPTION SELECTION EXAMPLE: CNHCXCN

	(X)	(C)	(N)	MATERIAL/COATING
X	C	30psi 2 bar .016 - .252 in. (0.4 - 6.4 mm)	N	Standard Material/Coating
	A	4 psi 0.3 bar .016 - .252 in. (0.4 - 6.4 mm)	E	EPDM
	B	15psi 1 bar .016 - .252 in. (0.4 - 6.4 mm)	V	/AP
	D	50 psi 3.5 bar .016 - .252 in. (0.4 - 6.4 mm)		/LH
	E	75 psi 5 bar .016 - .252 in. (0.4 - 6.4 mm)		
	F	100 psi 7bar .016 - .252 in. (0.4 - 6.4 mm)		

TECHNICAL FEATURES

-
- 1 2 5000psi 350bar
- EPDM
- 2 1
-
-
- "AP"
- Sun

PERFORMANCE CURVES

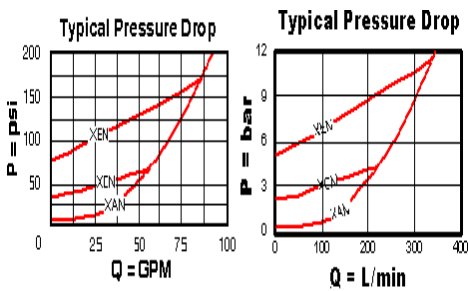

Note: Performance data shown reflects a blocked orifice.