


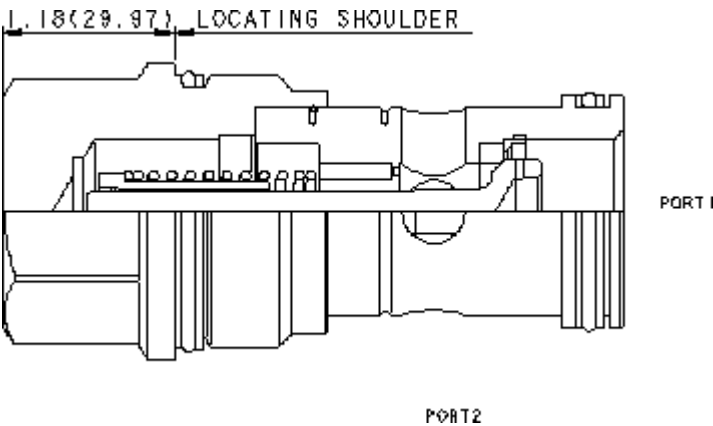

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-18A
Series	4
Capacity	480 L/min.
Maximum Operating Pressure	350 bar
Orifice Range	0,4 - 5,5 mm
Valve Hex Size	41,3 mm
Valve Installation Torque	474 - 508 Nm
Seal kit - Cartridge	Buna: 990-018-007
Seal kit - Cartridge	Polyurethane: 990-018-002
Seal kit - Cartridge	Viton: 990-018-006
Seal kit - Cartridge	Buna: 990-018-007
Seal kit - Cartridge	Polyurethane: 990-018-002
Seal kit - Cartridge	Viton: 990-018-006

OPTION SELECTION EXAMPLE: CNICXCN

CONTROL	(X)	SETTING RANGE	(C)	SEAL MATERIAL	(N)
X	Not Adjustable	C	30 psi (2 bar) Cracking Pressure, .016 - .218 in. (0,4 - 5,5 mm)	N	Buna-N
				V	Viton

PERFORMANCE CURVES

