

PORT2
RESTRICTED FLOW INLET

PORT1
FREE FLOW INLET

1 2 2 1

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-18A
	4
	480 L/min.
	350 bar
	0,4 - 9 mm
	41,3 mm
	474 - 508 Nm
Seal kit - Cartridge	Buna: 990-018-007
Seal kit - Cartridge	Polyurethane: 990-018-002
Seal kit - Cartridge	Viton: 990-018-006
Seal kit - Cartridge	Buna: 990-018-007
Seal kit - Cartridge	Polyurethane: 990-018-002
Seal kit - Cartridge	Viton: 990-018-006


OPTION SELECTION EXAMPLE: CNJCXCN

	(X)	(C)	(N)	MATERIAL/COATING
X	C	30psi 2 bar .016 - .354 in. (0.4 - 9 mm)	N	Standard Material/Coating
	A	4 psi 0.3 bar .016 - .354 in. (0.4 - 9 mm)	V	/AP
	B	15psi 1 bar .016 - .354 in. (0.4 - 9 mm)		
	D	50 psi 3.5 bar .016 - .354 in. (0.4 - 9 mm)		
	E	75 psi 5 bar .016 - .354 in. (0.4 - 9 mm)		
	F	100 psi 7bar .016 - .354 in. (0.4 - 9 mm)		
	G	150psi 10 bar .016 - .354 in. (0.4 - 9 mm)		
	Z	1 psi 0.07bar .016 - .354 in. (0.4 - 9 mm)		

TECHNICAL FEATURES

-
- 1 2 5000psi 350bar
- 2 1
-
-
- "AP"
- Sun

PERFORMANCE CURVES

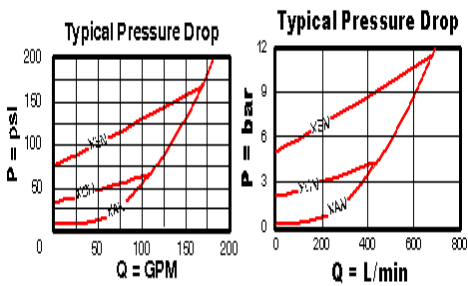

Note: Performance data shown reflects a blocked orifice.