
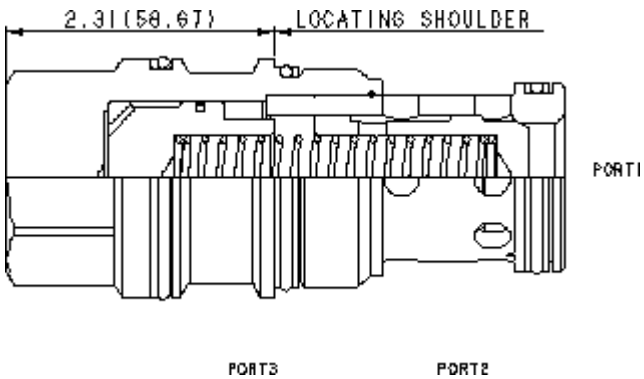




TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-19A
Series	4
Capacity	610 L/min.
Orifice Range	0,4 - 9 mm
Valve Hex Size	41,3 mm
Valve Installation Torque	474 - 508 Nm
Seal kit - Cartridge	Buna: 990-019-007
Seal kit - Cartridge	Polyurethane: 990-019-002
Seal kit - Cartridge	Viton: 990-019-006
Seal kit - Cartridge	Buna: 990-019-007
Seal kit - Cartridge	Polyurethane: 990-019-002
Seal kit - Cartridge	Viton: 990-019-006

OPTION SELECTION EXAMPLE: CNJEXAN

CONTROL	(X)	SETTING RANGE	(A)	SEAL MATERIAL	(N)
X	Not Adjustable	A	4 psi (0,3 bar) Cracking Pressure, .016 - .354 in. (0,4 - 9 mm)	N	Buna-N
		B	15 psi (1 bar) Cracking Pressure, .016 - .354 in. (0,4 - 9 mm)	V	Viton
		C	30 psi (2 bar) Cracking Pressure, .016 - .354 in. (0,4 - 9 mm)		
		D	50 psi (3,5 bar) Cracking Pressure, .016 - .354 in. (0,4 - 9 mm)		
		E	75 psi (5 bar) Cracking Pressure, .016 - .354 in. (0,4 - 9 mm)		
		F	100 psi (7 bar) Cracking Pressure, .016 - .354 in. (0,4 - 9 mm)		
		Z	1 psi (0,07 bar) Cracking Pressure, .016 - .354 in. (0,4 - 9 mm)		