
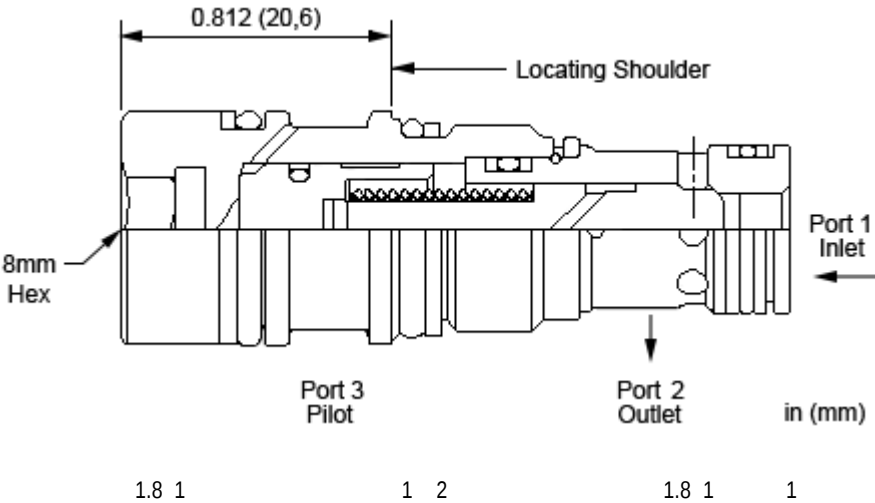




TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-163A
	0
	40 L/min.
	350 bar
	3.4:1
110 SUS (24 cSt)	0,07 cc/min.
	8 mm
	27 - 33 Nm
	0,10 kg
Seal kit - Cartridge	Buna: 990-163-007
Seal kit - Cartridge	Polyurethane: 990-163-002
Seal kit - Cartridge	Viton: 990-163-006
Seal kit - Cartridge	Buna: 990-163-007
Seal kit - Cartridge	Polyurethane: 990-163-002
Seal kit - Cartridge	Viton: 990-163-006

OPTION SELECTION EXAMPLE: COBGXEFN

(X)	(E)	(N)	MATERIAL/COATING
X	E 75 psi (5 bar) C 30 psi (2 bar) D 50 psi (3,5 bar) F 100 psi (7 bar)	N V	Standard Material/Coating /AP

TECHNICAL FEATURES

-
- A,B 4,15psi 0.3,1bar
- 1.8:1 1000psi 70bar 1800psi 125bar 1
- 2
- 2 1
- Sun

PERFORMANCE CURVES

