


CONFIGURATION

X	Control	Standard Pilot
E	Cracking Pressure	75 psi (5 bar)
N	Seal Material	Buna-N
	Material/Coating	

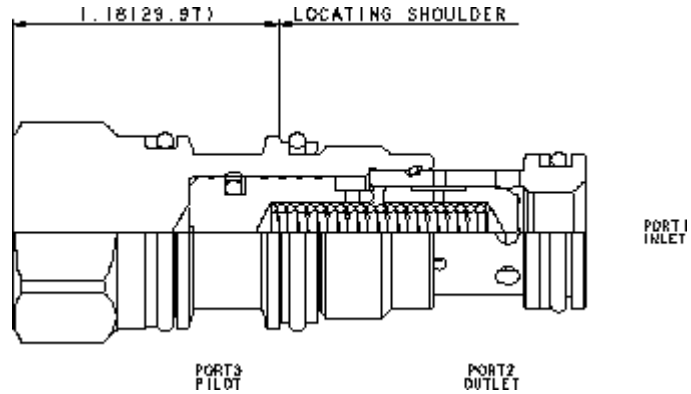

This valve is a spring biased closed, pilot-to-close check cartridge that has a 1.8:1 pilot ratio. The valve allows flow from port 1 to port 2 and blocks reverse flow. Pressure at the pilot port opposes pressure at port 1 at a ratio of 1.8:1. This valve is most often used in regeneration circuits.

TECHNICAL DATA

Maximum Operating Pressure	5000 psi
Pilot Ratio	1.8:1
Maximum Valve Leakage at 110 SUS (24 cSt)	1 drops/min.
Seal kit - Cartridge	Buna: 990-011-007
Seal kit - Cartridge	EPDM: 990-011-014
Seal kit - Cartridge	Polyurethane: 990-011-002
Seal kit - Cartridge	Viton: 990-011-006

CONFIGURATION OPTIONS

Model Code Example: CODAXEN

CONTROL	(X)	CRACKING PRESSURE	(E)	SEAL MATERIAL	(N)	MATERIAL/COATING	(/LH)
X Standard Pilot		E 75 psi (5 bar)		N Buna-N		/LH Mild Steel, Zinc-Nickel	
		A 4 psi (0,3 bar)		E EPDM		/AP Stainless Steel, Passivated	
		B 15 psi (1 bar)		V Viton		Standard Material/Coating	
		C 30 psi (2 bar)					
		D 50 psi (3,5 bar)					
		F 100 psi (7 bar)					
		G 150 psi (10,5 bar)					