


CONFIGURATION

X	Control	piloto estándar
E	Cracking Pressure	75 psi (5 bar)
N	Seal Material	Buna-N
	Material/Coating	

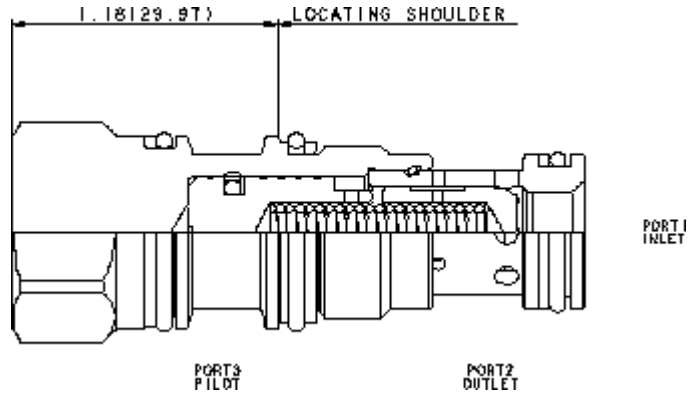

TECHNICAL DATA

Maximum Operating Pressure	350 bar
Pilot Ratio	1.8:1
Maximum Valve Leakage at 110 SUS (24 cSt)	0,07 cc/min.
Seal kit - Cartridge	Buna: 990-011-007
Seal kit - Cartridge	EPDM: 990-011-014
Seal kit - Cartridge	Polyurethane: 990-011-002
Seal kit - Cartridge	Viton: 990-011-006
Seal kit - Cartridge	Buna: 990-011-007
Seal kit - Cartridge	EPDM: 990-011-014
Seal kit - Cartridge	Polyurethane: 990-011-002
Seal kit - Cartridge	Viton: 990-011-006

CONFIGURATION OPTIONS

Model Code Example: CODAXEN

CONTROL	(X)	CRACKING PRESSURE	(E)	SEAL MATERIAL	(N)	MATERIAL/COATING	(/LH)
X	piloto estándar	E	75 psi (5 bar)	N	Buna-N	/LH	Mild Steel, Zinc-Nickel
L	activador manual	F	100 psi (7 bar)	E	EPDM	/AP	Stainless Steel, Passivated
		G	150 psi (10,5 bar)	V	Viton		Standard Material/Coating
		Z	1 psi (0,07 bar)				