


CONFIGURATION

X	Control	piloto estándar
A	Cracking Pressure	4 psi (0,3 bar)
N	Seal Material	Buna-N
	Material/Coating	

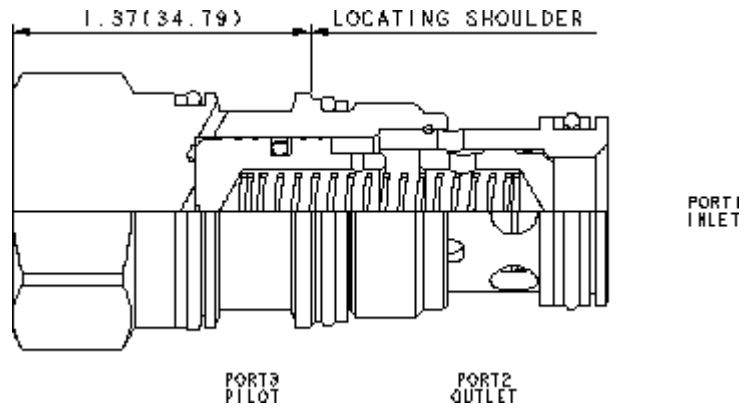

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-2A
Series	2
Capacity	160 L/min.
Maximum Operating Pressure	350 bar
Pilot Ratio	1.8:1
Maximum Valve Leakage at 110 SUS (24 cSt)	0,07 cc/min.
Valve Hex Size	28,6 mm
Valve Installation Torque	61 - 68 Nm
Model Weight	0.22 kg.
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	EPDM: 990-202-014
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	EPDM: 990-202-014
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006

OPTION SELECTION EXAMPLE: COFAXAN

CONTROL	(X)	CRACKING PRESSURE	(A)	SEAL MATERIAL	(N)	MATERIAL/COATING	(/LH)
X piloto estándar		A 4 psi (0,3 bar)		N Buna-N		/LH Mild Steel, Zinc-Nickel	
L activador manual		F 100 psi (7 bar)		E EPDM		/AP Stainless Steel, Passivated	
		J 135 psi (9,5 bar)		V Viton		Standard Material/Coating	

PERFORMANCE CURVES

