


CONFIGURATION

X	Control	piloto estándar
E	Cracking Pressure	75 psi (5 bar)
N	Seal Material	Buna-N
	Material/Coating	

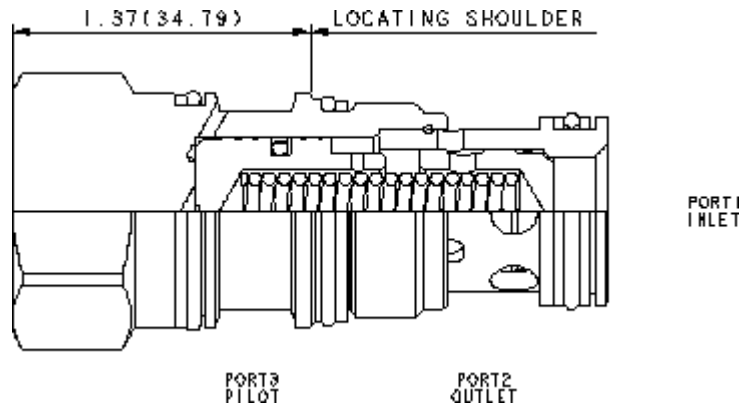

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-2A
Series	2
Capacity	160 L/min.
Maximum Operating Pressure	350 bar
Pilot Ratio	1.8:1
Maximum Valve Leakage at 110 SUS (24 cSt)	0,07 cc/min.
Valve Hex Size	28,6 mm
Valve Installation Torque	61 - 68 Nm
Model Weight	0.23 kg.
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	EPDM: 990-202-014
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	EPDM: 990-202-014
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006

OPTION SELECTION EXAMPLE: COFAXEN

CONTROL	(X) CRACKING PRESSURE	(E) SEAL MATERIAL	(N) MATERIAL/COATING
X piloto estándar	E 75 psi (5 bar)	N Buna-N	/LH Mild Steel, Zinc-Nickel
L activador manual	F 100 psi (7 bar)	E EPDM	/AP Stainless Steel, Passivated
	J 135 psi (9,5 bar)	V Viton	Standard Material/Coating

PERFORMANCE CURVES

