


CONFIGURATION

Material/Coating

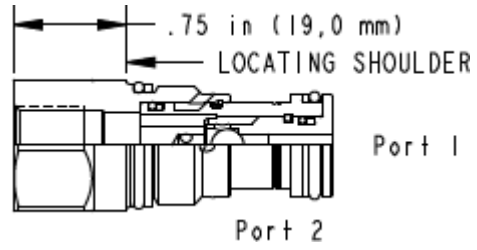

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-13A
	1
	10 L/min.
	350 bar
110 SUS (24 cSt)	0,3 cc/min.
	22,2 mm
	41 - 47 Nm
	0.10 kg.
Seal kit - Cartridge	Buna: 990-010-007
Seal kit - Cartridge	Polyurethane: 990-010-002
Seal kit - Cartridge	Viton: 990-010-006

OPTION SELECTION EXAMPLE: CSAABXN

(X)	(N)	MATERIAL/COATING	(/LH)
X -	N	/LH -	
	E EPDM	/AP	
	V	Standard Material/Coating	

TECHNICAL FEATURES

-
-
- Sun

PERFORMANCE CURVES

