


CONFIGURATION

- Adjustment Range
- Seal Material
- Material/Coating

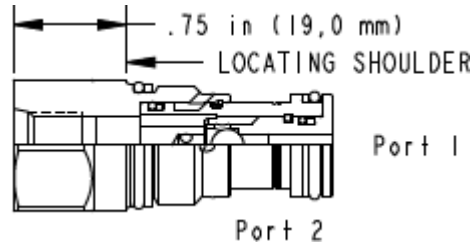

The single ball shuttle connects the higher of two work ports to the signal or common port. The signal is sensed at an

external port located in the hex-end of the cartridge.

TECHNICAL DATA

Maximum Operating Pressure	5000 psi
Maximum Valve Leakage at 110 SUS (24 cSt)	5 drops/min.
Seal kit - Cartridge	Buna: 990-010-007
Seal kit - Cartridge	Polyurethane: 990-010-002
Seal kit - Cartridge	Viton: 990-010-006

CONFIGURATION OPTIONS

Model Code Example: **CSAAEXN**

ADJUSTMENT RANGE

(X) SEAL MATERIAL

(N) MATERIAL/COATING

((LH))

X -

- N** Buna-N
- E** EPDM
- V** Viton

- /LH** Mild Steel, Zinc-Nickel
- /AP** Stainless Steel, Passivated
- Standard Material/Coating