


CONFIGURATION

A	Control	Auxiliary External -4 SAE Port
X	Adjustment Range	-
N	Seal Material	Buna-N
	Material/Coating	

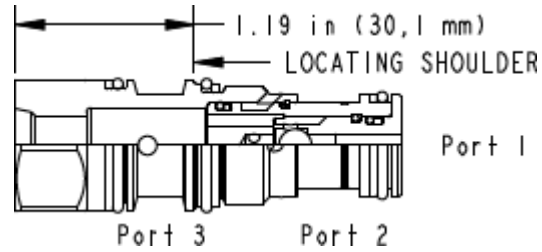

The single ball shuttle connects the higher of two work ports to the signal or common port. The signal is sensed at port 3.

TECHNICAL DATA

Maximum Operating Pressure	5000 psi
Maximum Valve Leakage at 110 SUS (24 cSt)	5 drops/min.
Seal kit - Cartridge	Buna: 990-011-007
Seal kit - Cartridge	EPDM: 990-011-014
Seal kit - Cartridge	Polyurethane: 990-011-002
Seal kit - Cartridge	Viton: 990-011-006

CONFIGURATION OPTIONS

Model Code Example: CSABAXN

CONTROL	(A)	ADJUSTMENT RANGE	(X)	SEAL MATERIAL	(N)	MATERIAL/COATING	(/LH)
A	Auxiliary External -4 SAE Port	X	-	N	Buna-N	/LH	Mild Steel, Zinc-Nickel
B	Auxiliary External 1/4 BSPP Port			E	EPDM	/AP	Stainless Steel, Passivated
E	External 4-SAE Port, Port 3 blocked			V	Viton		Standard Material/Coating
X	Not Adjustable						