


CONFIGURATION

A	Control	Auxiliary External -4 SAE Port
X	Adjustment Range	-
N	Seal Material	Buna-N
	Material/Coating	

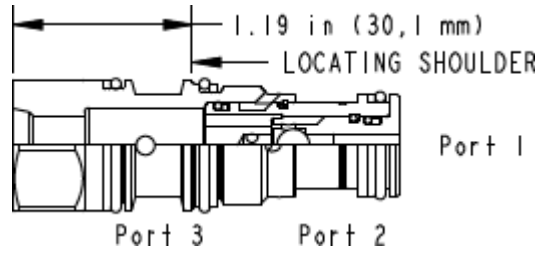

TECHNICAL DATA

Maximum Operating Pressure	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	0,3 cc/min.
Seal kit - Cartridge	Buna: 990-011-007
Seal kit - Cartridge	EPDM: 990-011-014
Seal kit - Cartridge	Polyurethane: 990-011-002
Seal kit - Cartridge	Viton: 990-011-006
Seal kit - Cartridge	Buna: 990-011-007
Seal kit - Cartridge	EPDM: 990-011-014
Seal kit - Cartridge	Polyurethane: 990-011-002
Seal kit - Cartridge	Viton: 990-011-006

CONFIGURATION OPTIONS

Model Code Example: CSABAXN

CONTROL	(A)	ADJUSTMENT RANGE	(X)	SEAL MATERIAL	(N)	MATERIAL/COATING	(/LH)
A	Auxiliary External -4 SAE Port	X	-	N	Buna-N	/LH	Mild Steel, Zinc-Nickel
B	Auxiliary External 1/4 BSPP Port			E	EPDM	/AP	Stainless Steel, Passivated
X	Not Adjustable			V	Viton		Standard Material/Coating