


CONFIGURATION

A	Control	Auxiliary External -4 SAE Port
X	Adjustment Range	-
N	Seal Material	Buna-N
	Material/Coating	

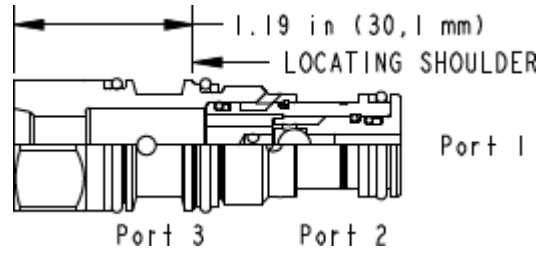

NOTE: DATA MAY VARY FROM LISTED DATA. SEE CONFIGURATION SECTION.

TECHNICAL DATA

cavidad	T-11A
Series	1
Capacity	10 L/min.
Maximum Operating Pressure	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	0,3 cc/min.
Valve Hex Size	22,2 mm
Valve Installation Torque	41 - 47 Nm
Model Weight	0.11 kg.
Seal kit - Cartridge	Buna: 990-011-007
Seal kit - Cartridge	EPDM: 990-011-014
Seal kit - Cartridge	Polyurethane: 990-011-002
Seal kit - Cartridge	Viton: 990-011-006
Seal kit - Cartridge	Buna: 990-011-007
Seal kit - Cartridge	EPDM: 990-011-014
Seal kit - Cartridge	Polyurethane: 990-011-002
Seal kit - Cartridge	Viton: 990-011-006

OPTION SELECTION EXAMPLE: CSABAXN

CONTROL	(A) ADJUSTMENT RANGE	(X) SEAL MATERIAL	(N) MATERIAL/COATING
A Auxiliary External -4 SAE Port	X -	N Buna-N	/LH Mild Steel, Zinc-Nickel
B Auxiliary External 1/4 BSPP Port		E EPDM	/AP Stainless Steel, Passivated
X Not Adjustable		V Viton	Standard Material/Coating

PERFORMANCE CURVES

