


CONFIGURATION

X	Control	Not Adjustable
X	Adjustment Range	-
N	Seal Material	Buna-N
	Material/Coating	

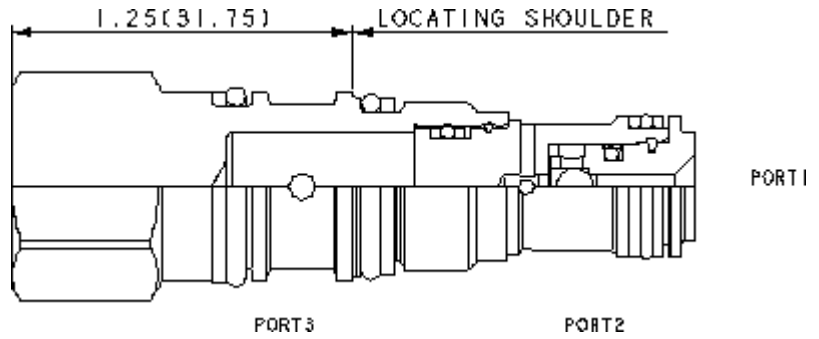

The single ball shuttle connects the higher of two work ports to the signal or common port. The signal is sensed at port 3.

TECHNICAL DATA

Maximum Operating Pressure	5000 psi
Maximum Valve Leakage at 110 SUS (24 cSt)	5 drops/min.
Seal kit - Cartridge	Buna: 990-163-007
Seal kit - Cartridge	Polyurethane: 990-163-002
Seal kit - Cartridge	Viton: 990-163-006

CONFIGURATION OPTIONS

Model Code Example: **CSAXXXN**

CONTROL	(X)	ADJUSTMENT RANGE	(X)	SEAL MATERIAL	(N)	MATERIAL/COATING	(/LH)
X	Not Adjustable	X	-	N	Buna-N	/LH	Mild Steel, Zinc-Nickel
B	External 1/4 BSPP Port			V	Viton	/AP	Stainless Steel, Passivated
E	External 4-SAE Port						Standard Material/Coating