


CONFIGURATION

X	
X	-
N	
	Material/Coating

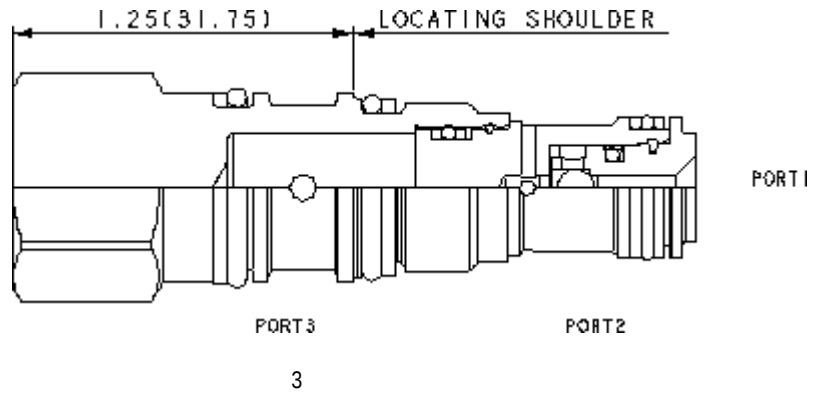

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-163A
	0
	4,7 L/min.
	350 bar
110 SUS (24 cSt)	0,3 cc/min.
	19,1 mm
	27 - 33 Nm
	0.08 kg.
Seal kit - Cartridge	Buna: 990-163-007
Seal kit - Cartridge	Polyurethane: 990-163-002
Seal kit - Cartridge	Viton: 990-163-006

OPTION SELECTION EXAMPLE: CSAXXXN

	(X)	(X)	(N)	MATERIAL/COATING	(/LH)
X	X	X	N	/LH	-
B	1/4 BSPP		V	/AP	
E	4-SAE				Standard Material/Coating

TECHNICAL FEATURES

-
-
- Sun

PERFORMANCE CURVES

