

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-21A
	1
	60 L/min.
	2:1
	320 bar
	420 bar
	2,8 bar
	0,3 cc/min.
	30 cc/min.
	5
	>85% of setting
	22,2 mm
	41 - 47 Nm
	4 mm
	15 mm
	9 - 10 Nm
	0.19 kg.
Seal kit - Cartridge	Buna: 990-021-007
Seal kit - Cartridge	Polyurethane: 990-021-002
Seal kit - Cartridge	Viton: 990-021-006
Seal kit - Cartridge	Buna: 990-021-007
Seal kit - Cartridge	Polyurethane: 990-021-002
Seal kit - Cartridge	Viton: 990-021-006

# OPTION SELECTION EXAMPLE: CWCLLGN


	(L)	(G)	(N)	MATERIAL/COATING
<b>L</b>	<b>G</b>	<b>N</b>	<b>V</b>	Standard Material/Coating
	2000 - 6000 psi (140 - 420 bar), 4000 psi (280 bar)			/AP
	F 1000 - 2500 psi (70 - 175 bar), 2000 psi (140 bar)			/LH -

## TECHNICAL FEATURES


- 1.3
- 
- 200psi 14bar
- 4
- 85%
- 4 1+ x
- Sun
- 
- 
- Sun

## PERFORMANCE CURVES


**Free Flow and Piloted Open Pressure Drop**

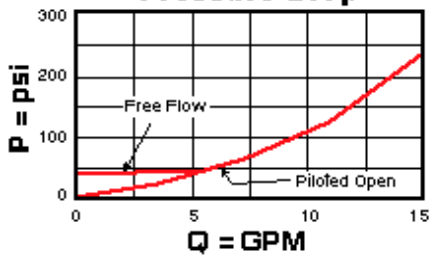

**Free Flow and Piloted Open Pressure Drop**

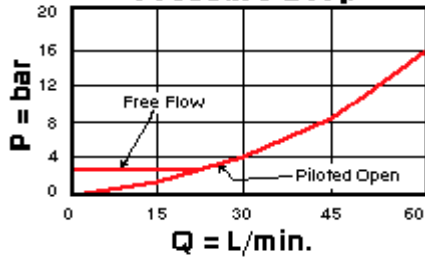

**Typical Relief Characteristics**

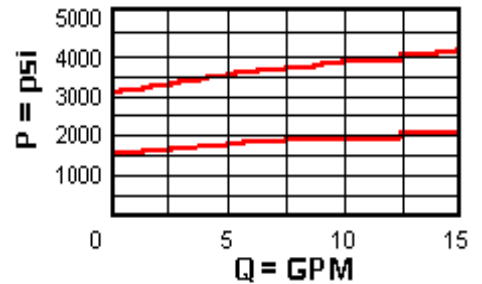

**Typical Relief Characteristics**

