

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

| | |
|----------------------|---------------------------|
| | T-21A |
| | 1 |
| | 60 L/min. |
| | 2:1 |
| | 320 bar |
| | 420 bar |
| | 2,8 bar |
| | 0,3 cc/min. |
| | 30 cc/min. |
| | 5 |
| | >85% of setting |
| | 22,2 mm |
| | 41 - 47 Nm |
| | 4 mm |
| | 15 mm |
| | 9 - 10 Nm |
| | 0,20 kg |
| Seal kit - Cartridge | Buna: 990-021-007 |
| Seal kit - Cartridge | Polyurethane: 990-021-002 |
| Seal kit - Cartridge | Viton: 990-021-006 |

OPTION SELECTION EXAMPLE: CWCLLGNV


| | (L) | (G) | (N) | MATERIAL/COATING |
|------------|--|----------|---------------------------|------------------|
| L | G | N | Standard Material/Coating | |
| C - | F 1000 - 2500 psi (70 - 175 bar), 2000 psi (140 bar) | V | /AP | |
| | | | /LH | |

TECHNICAL FEATURES


- 1.3
-
- 200psi 14bar
- 4
- 85%
- 4 1+ x
- Sun
-
-
- Sun

PERFORMANCE CURVES


Free Flow and Piloted Open Pressure Drop

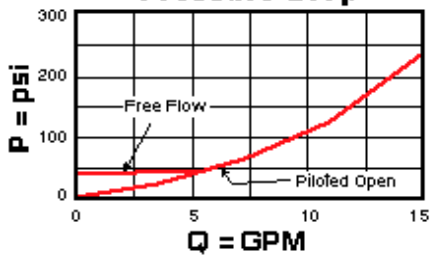

Free Flow and Piloted Open Pressure Drop

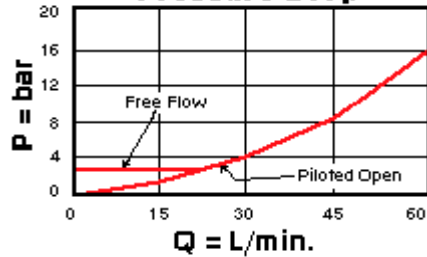

Typical Relief Characteristics

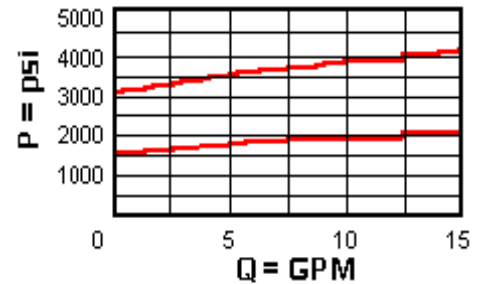

Typical Relief Characteristics

