




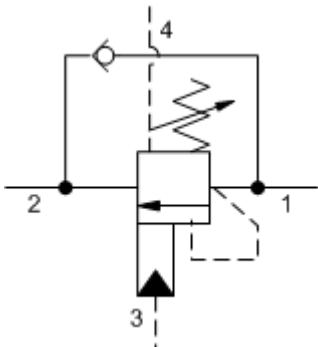

4-Port Vented



4-Port Vented, Non-adjustable

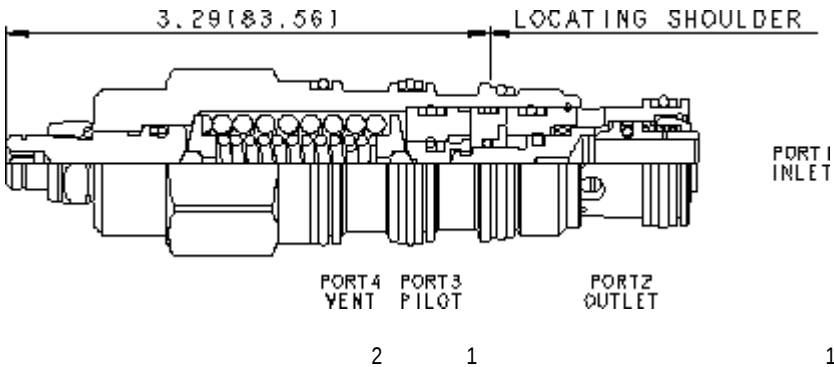

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	1:1
	215 bar
	280 bar
	1,7 bar
	0,3 cc/min.
	30 cc/min.
-	5
	>85% of setting
	15 mm
	9 - 10 Nm
Seal kit - Cartridge	Buna: 990-022-007
Seal kit - Cartridge	Polyurethane: 990-022-002
Seal kit - Cartridge	Viton: 990-022-006
Seal kit - Cartridge	Buna: 990-022-007
Seal kit - Cartridge	Polyurethane: 990-022-002
Seal kit - Cartridge	Viton: 990-022-006

CONFIGURATION OPTIONS

Model Code Example: CWEKLHN

(L)

(H)

(N)

MATERIAL/COATING

L

H 1000 - 4000 psi (70 - 280 bar),
3000 psi (210 bar)
I 400 - 1500 psi (28 - 105 bar), 1000
psi (70 bar)

N
V

Standard Material/Coating
/LH -