






4-Port Vented



4-Port Vented, Non-adjustable

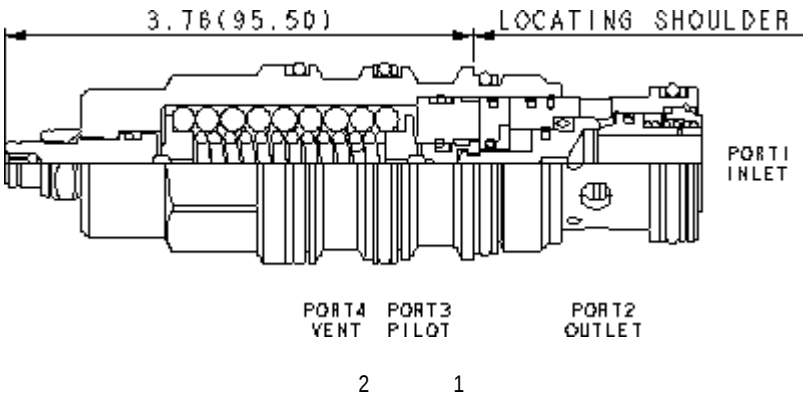

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	1:1
	215 bar
	280 bar
	1,7 bar
	0,3 cc/min.
	30 cc/min.
	5
	>85% of setting
	15 mm
	9 - 10 Nm
Seal kit - Cartridge	Buna: 990-023-007
Seal kit - Cartridge	Polyurethane: 990-023-002
Seal kit - Cartridge	Viton: 990-023-006
Seal kit - Cartridge	Buna: 990-023-007
Seal kit - Cartridge	Polyurethane: 990-023-002
Seal kit - Cartridge	Viton: 990-023-006

CONFIGURATION OPTIONS

Model Code Example: CWGKLHN

(L)	(H)	(N)	MATERIAL/COATING
L	H 1000 - 4000 psi (70 - 280 bar), 3000 psi (210 bar) I 400 - 1500 psi (28 - 105 bar), 1000 psi (70 bar)	N V	Standard Material/Coating /LH -