

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-23A
	3
	240 L/min.
	2:1
	320 bar
	420 bar
	1,7 bar
	0,3 cc/min.
	30 cc/min.
	5
	>85% of setting
	31,8 mm
	203 - 217 Nm
	4 mm
	15 mm
	9 - 10 Nm
	0,70 kg
Seal kit - Cartridge	Buna: 990-023-007
Seal kit - Cartridge	Polyurethane: 990-023-002
Seal kit - Cartridge	Viton: 990-023-006

# OPTION SELECTION EXAMPLE: CWGLLGNV


	(L)	(G)	(N) MATERIAL/COATING
<b>L</b>	<b>G</b> 2000 - 6000 psi (140 - 420 bar), 4000 psi (280 bar)	<b>N</b>	Standard Material/Coating
<b>C</b> -	<b>F</b> 1000 - 2500 psi (70 - 175 bar), 2000 psi (140 bar)	<b>V</b>	/AP

## TECHNICAL FEATURES


- 1.3
- 
- 200psi 14bar
- 4
- 85%
- 4 1+ x
- Sun
- 
- 
- Sun

## PERFORMANCE CURVES


**Free Flow and Piloted Open Pressure Drop**

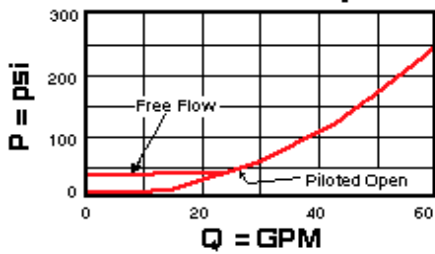

**Free Flow and Piloted Open Pressure Drop**

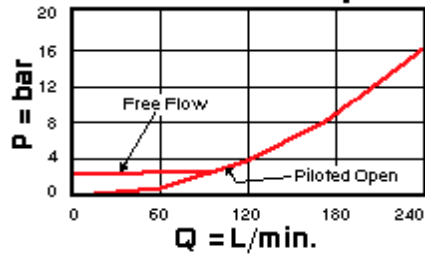

**Typical Relief Characteristics**

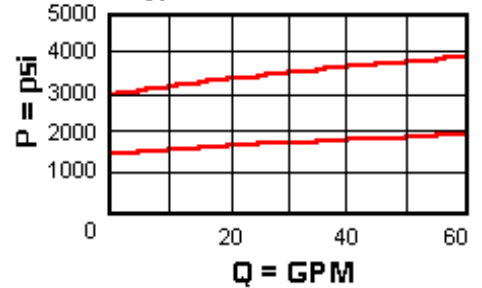

**Typical Relief Characteristics**

