


CONFIGURATION

X	
C	30 psi (2 bar)
N	
Material/Coating	

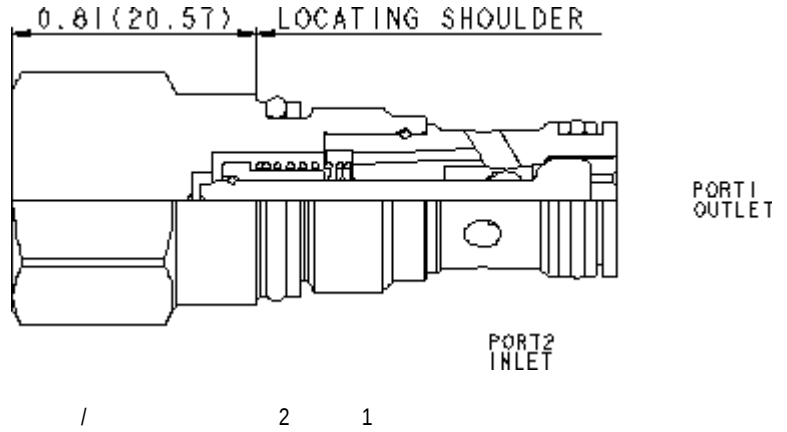

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-162A
	0
	30 L/min.
	350 bar
110 SUS (24 cSt)	0,07 cc/min.
	19,1 mm
	27 - 33 Nm
	0.08 kg.
Seal kit - Cartridge	Buna: 990-162-007
Seal kit - Cartridge	EPDM: 990-162-014
Seal kit - Cartridge	Polyurethane: 990-162-002
Seal kit - Cartridge	Viton: 990-162-006
Seal kit - Cartridge	Buna: 990-162-007
Seal kit - Cartridge	EPDM: 990-162-014
Seal kit - Cartridge	Polyurethane: 990-162-002
Seal kit - Cartridge	Viton: 990-162-006

OPTION SELECTION EXAMPLE: CXADXCN

	(X)	(C)	(N)	MATERIAL/COATING	(/LH)
X	C 30 psi (2 bar)	N	/LH	-	
L	A 4 psi (0,3 bar)	E EPDM	/AP		
	D 50 psi (3,5 bar)	V		Standard Material/Coating	
	E 75 psi (5 bar)				
	Z 1 psi (0,07 bar)				

TECHNICAL FEATURES

-
-
-
- 1 2 5000psi 350bar
- 3 4 30 75psi 0.3 2 5bar
- Sun

PERFORMANCE CURVES

