


**CONFIGURATION**

X	
C	30 psi (2 bar)
N	
	Material/Coating

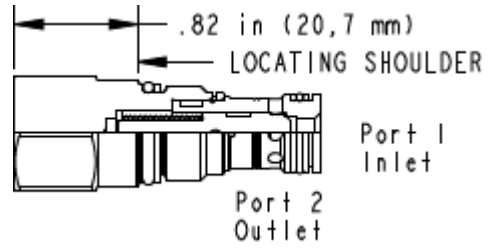

/ 1 2

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-162A
	0
	40 L/min.
	350 bar
110 SUS (24 cSt)	0,07 cc/min.
	19,1 mm
	27 - 33 Nm
	0.08 kg.
Seal kit - Cartridge	Buna: 990-162-007
Seal kit - Cartridge	EPDM: 990-162-014
Seal kit - Cartridge	Polyurethane: 990-162-002
Seal kit - Cartridge	Viton: 990-162-006
Seal kit - Cartridge	Buna: 990-162-007
Seal kit - Cartridge	EPDM: 990-162-014
Seal kit - Cartridge	Polyurethane: 990-162-002
Seal kit - Cartridge	Viton: 990-162-006

## OPTION SELECTION EXAMPLE: CXBAXCN

	(X)	(C)	(N)	MATERIAL/COATING	(/LH)
<b>X</b>	<b>C</b>	30 psi (2 bar)	<b>N</b>	/LH	-
	A	4 psi (0,3 bar)	E	EPDM	/AP
	B	15 psi (1 bar)	V		Standard Material/Coating
	D	50 psi (3,5 bar)			
	E	75 psi (5 bar)			
	F	100 psi (7 bar)			
	Z	1 psi (0,07 bar)			

### TECHNICAL FEATURES

- 
- 
- 1 2 5000psi 350bar
- EPDM
- Sun

### PERFORMANCE CURVES

