


**CONFIGURATION**

X	Control	Not Adjustable
C	Cracking Pressure	30 psi (2 bar)
N	Seal Material	Buna-N

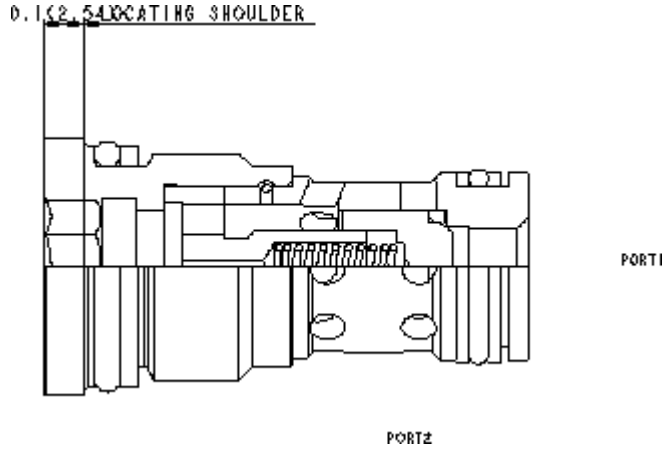

Free-flow, nose-to-side check valves are on/off circuit components that allow free flow from the inlet (port 1) to the outlet (port 2) and block flow in the opposite direction.

**TECHNICAL DATA**

Maximum Operating Pressure	5000 psi
Maximum Valve Leakage at 110 SUS (24 cSt)	1 drops/min.
Valve Internal Hex Size	5/16 in.
Seal kit - Cartridge	Buna: 990-162-007
Seal kit - Cartridge	EPDM: 990-162-014
Seal kit - Cartridge	Polyurethane: 990-162-002
Seal kit - Cartridge	Viton: 990-162-006

**CONFIGURATION OPTIONS**

Model Code Example: CXBMXCN

CONTROL	(X)	CRACKING PRESSURE	(C)	SEAL MATERIAL	(N)
X	Not Adjustable	C	30 psi (2 bar)	N	Buna-N
		A	4 psi (0,3 bar)	E	EPDM
		B	15 psi (1 bar)	V	Viton