


**CONFIGURATION**

X	Control	Not Adjustable
A	Cracking Pressure	4 psi (0,3 bar)
N	Seal Material	Buna-N
	Material/Coating	

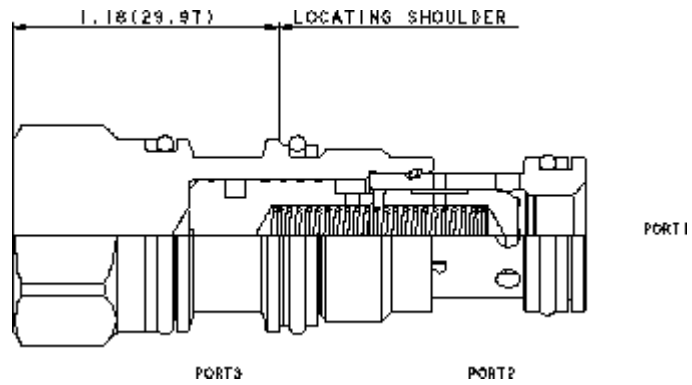

**TECHNICAL DATA**

Maximum Operating Pressure	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	0,07 cc/min.
Seal kit - Cartridge	Buna: 990-011-007
Seal kit - Cartridge	Polyurethane: 990-011-002
Seal kit - Cartridge	Viton: 990-011-006
Seal kit - Cartridge	Buna: 990-011-007
Seal kit - Cartridge	Polyurethane: 990-011-002
Seal kit - Cartridge	Viton: 990-011-006

**CONFIGURATION OPTIONS**

**Model Code Example: CXDCXAN**

CONTROL	(X)	CRACKING PRESSURE	(A)	SEAL MATERIAL	(N)	MATERIAL/COATING	(/LH)
X	Not Adjustable	A	4 psi (0,3 bar)	N	Buna-N	/LH	Mild Steel, Zinc-Nickel
		F	100 psi (7 bar)	V	Viton	/AP	Stainless Steel, Passivated
		Z	1 psi (0,07 bar)				Standard Material/Coating