


CONFIGURATION

X	Control	Not Adjustable
C	Cracking Pressure	30 psi (2 bar)
N	Seal Material	Buna-N
	Material/Coating	

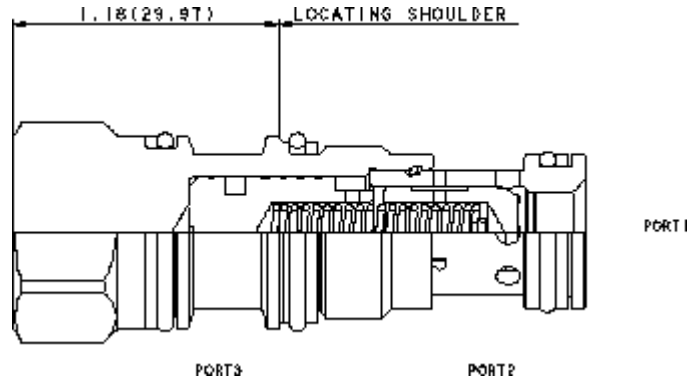

TECHNICAL DATA

Maximum Operating Pressure	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	0,07 cc/min.
Seal kit - Cartridge	Buna: 990-011-007
Seal kit - Cartridge	Polyurethane: 990-011-002
Seal kit - Cartridge	Viton: 990-011-006
Seal kit - Cartridge	Buna: 990-011-007
Seal kit - Cartridge	Polyurethane: 990-011-002
Seal kit - Cartridge	Viton: 990-011-006

CONFIGURATION OPTIONS

Model Code Example: CXDCXCN

CONTROL	(X)	CRACKING PRESSURE	(C)	SEAL MATERIAL	(N)	MATERIAL/COATING	(/LH)
X	Not Adjustable	C	30 psi (2 bar)	N	Buna-N	/LH	Mild Steel, Zinc-Nickel
		A	4 psi (0,3 bar)	V	Viton	/AP	Stainless Steel, Passivated
		B	15 psi (1 bar)				Standard Material/Coating
		D	50 psi (3,5 bar)				
		E	75 psi (5 bar)				
		F	100 psi (7 bar)				
		Z	1 psi (0,07 bar)				