


### CONFIGURATION

X	Control	Not Adjustable
C	Cracking Pressure	30 psi (2 bar)
N	Seal Material	Buna-N
	Material/Coating	

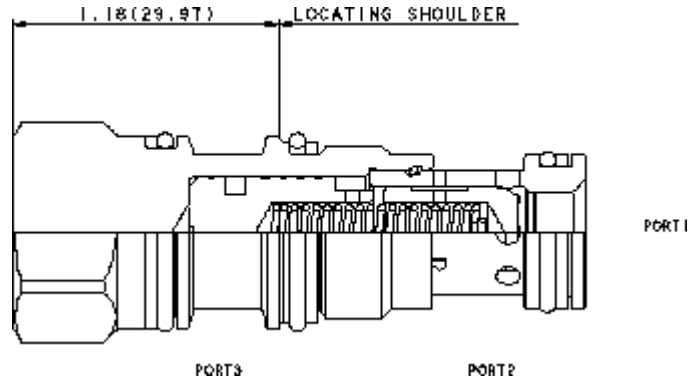

### TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-11A
Series	1
Capacity	80 L/min.
Maximum Operating Pressure	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	0,07 cc/min.
Valve Hex Size	22,2 mm
Valve Installation Torque	41 - 47 Nm
Seal kit - Cartridge	Buna: 990-011-007
Seal kit - Cartridge	Polyurethane: 990-011-002
Seal kit - Cartridge	Viton: 990-011-006
Seal kit - Cartridge	Buna: 990-011-007
Seal kit - Cartridge	Polyurethane: 990-011-002
Seal kit - Cartridge	Viton: 990-011-006

## OPTION SELECTION EXAMPLE: CXDCXCN

CONTROL	(X)	CRACKING PRESSURE	(C)	SEAL MATERIAL	(N)	MATERIAL/COATING	(/LH)
<b>X</b> Not Adjustable		<b>C</b> 30 psi (2 bar)		<b>N</b> Buna-N		<b>/LH</b> Mild Steel, Zinc-Nickel	
		A 4 psi (0,3 bar)		V Viton		<b>/AP</b> Stainless Steel, Passivated	
		B 15 psi (1 bar)				Standard Material/Coating	
		D 50 psi (3,5 bar)					
		E 75 psi (5 bar)					
		F 100 psi (7 bar)					
		Z 1 psi (0,07 bar)					

### PERFORMANCE CURVES

