


CONFIGURATION

X	
C	30 psi (2 bar)
N	
Material/Coating	

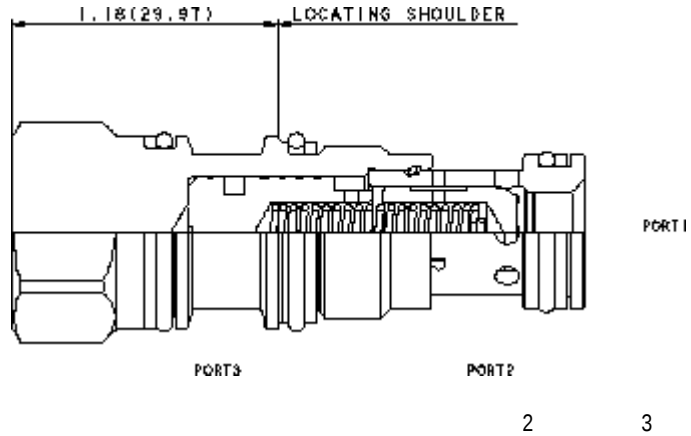

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-11A
	1
	80 L/min.
	350 bar
110 SUS (24 cSt)	0,07 cc/min.
	22,2 mm
	41 - 47 Nm
Seal kit - Cartridge	Buna: 990-011-007
Seal kit - Cartridge	Polyurethane: 990-011-002
Seal kit - Cartridge	Viton: 990-011-006
Seal kit - Cartridge	Buna: 990-011-007
Seal kit - Cartridge	Polyurethane: 990-011-002
Seal kit - Cartridge	Viton: 990-011-006

OPTION SELECTION EXAMPLE: CXDCXCN

	(X)	(C)	(N)	MATERIAL/COATING	(/LH)
X	C 30 psi (2 bar)	N	/LH	-	
	A 4 psi (0,3 bar)	V	/AP	Standard Material/Coating	
	B 15 psi (1 bar)				
	D 50 psi (3,5 bar)				
	E 75 psi (5 bar)				
	F 100 psi (7 bar)				
	Z 1 psi (0,07 bar)				

TECHNICAL FEATURES

- 1 0.07cc/min
- Sun

PERFORMANCE CURVES

