


### CONFIGURATION

<b>X</b> Control	Not Adjustable
<b>E</b> Cracking Pressure	75 psi (5 bar)
<b>N</b> Seal Material	Buna-N
Material/Coating	

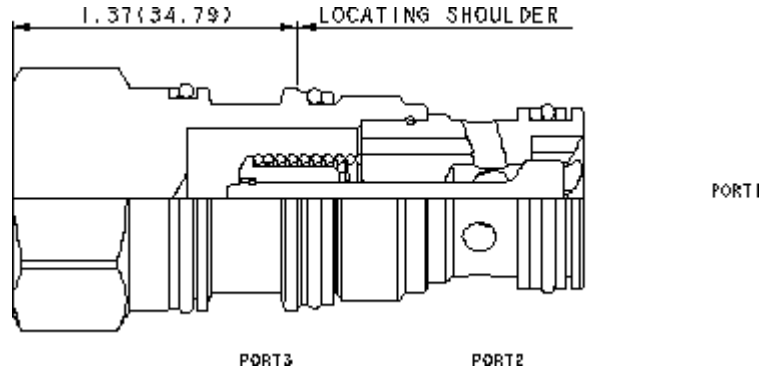

Free-flow, side-to-nose cheater check valves function as a standard 2-port check valve in a 3-port cavity with port 3 of the cartridge blocked off. These valves are useful in circuits where a check valve is required in an existing three port cavity.

### TECHNICAL DATA

Maximum Operating Pressure	5000 psi
Maximum Valve Leakage at 110 SUS (24 cSt)	1 drops/min.
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006

### CONFIGURATION OPTIONS

#### Model Code Example: CXEEXEN

CONTROL (X)	CRACKING PRESSURE (E)	SEAL MATERIAL (N)	MATERIAL/COATING (/LH)
<b>X</b> Not Adjustable	<b>E</b> 75 psi (5 bar)	<b>N</b> Buna-N	<b>/LH</b> Mild Steel, Zinc-Nickel
	<b>A</b> 4 psi (0,3 bar)	<b>V</b> Viton	<b>/AP</b> Stainless Steel, Passivated
	<b>B</b> 15 psi (1 bar)		Standard Material/Coating
	<b>C</b> 30 psi (2 bar)		
	<b>D</b> 50 psi (3,5 bar)		
	<b>F</b> 100 psi (7 bar)		
	<b>Z</b> 1 psi (0,07 bar)		