


CONFIGURATION

X	
E	75 psi (5 bar)
N	
	Material/Coating

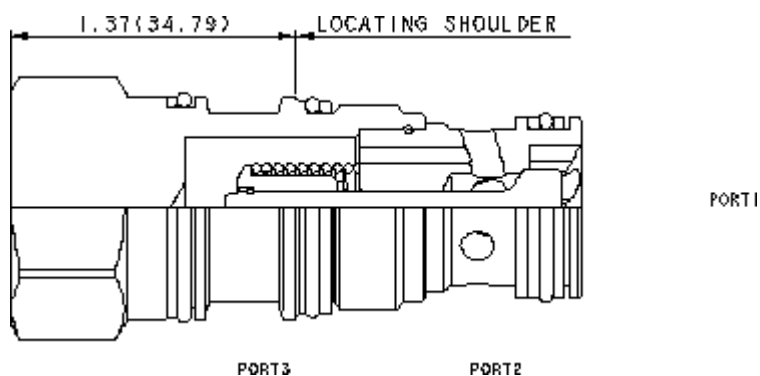

2 3 3 3

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-2A
	2
	120 L/min.
	350 bar
110 SUS (24 cSt)	0,07 cc/min.
	28,6 mm
	61 - 68 Nm
	0.22 kg.
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006
Seal kit - Cartridge	Buna: 990-202-007
Seal kit - Cartridge	Polyurethane: 990-002-002
Seal kit - Cartridge	Viton: 990-202-006

OPTION SELECTION EXAMPLE: CXEEXEN

(X)	(E)	(N)	MATERIAL/COATING	(/LH)
X	E 75 psi (5 bar)	N	/LH -	
	A 4 psi (0,3 bar)	V	/AP	
	B 15 psi (1 bar)			Standard Material/Coating
	C 30 psi (2 bar)			
	D 50 psi (3,5 bar)			
	F 100 psi (7 bar)			
	Z 1 psi (0,07 bar)			

TECHNICAL FEATURES

-
-
- 1 2 5000psi 350bar
- "/AP"
- Sun

PERFORMANCE CURVES

