


CONFIGURATION

X	Control	Not Adjustable
A	Cracking Pressure	4 psi (0,3 bar)
N	Seal Material	Buna-N
	Material/Coating	

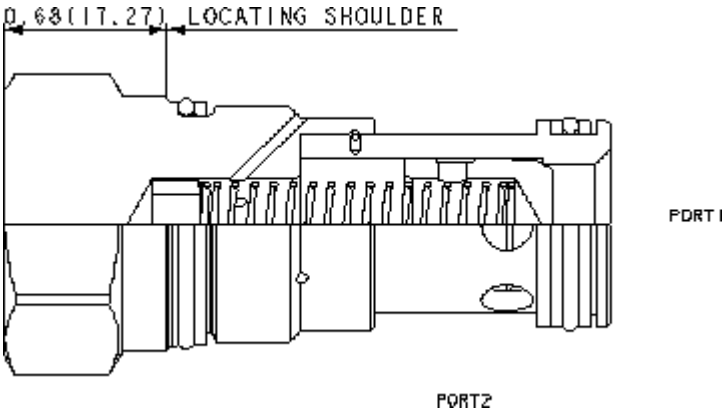

Free-flow, nose-to-side check valves are on/off circuit components that allow free flow from the inlet (port 1) to the outlet (port 2) and block flow in the opposite direction.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	T-3A
Series	2
Capacity	40 gpm
Valve Hex Size	1 1/8 in.
Valve Installation Torque	45 - 50 lbf ft
Seal kit - Cartridge	Buna: 990-203-007
Seal kit - Cartridge	Viton: 990-203-006

OPTION SELECTION EXAMPLE: CXFBXAN

CONTROL	(X)	CRACKING PRESSURE	(A)	SEAL MATERIAL	(N)	MATERIAL/COATING
X	Not Adjustable	A	4 psi (0,3 bar)	N	Buna-N	Standard Material/Coating
		B	15 psi (1 bar)	V	Viton	IAP
		C	30 psi (2 bar)			Stainless Steel, Passivated
		D	50 psi (3,5 bar)			
		E	75 psi (5 bar)			
		F	100 psi (7 bar)			

PERFORMANCE CURVES

