


### CONFIGURATION

X	Control	Not Adjustable
A	Cracking Pressure	4 psi (0,3 bar)
N	Seal Material	Buna-N
	Material/Coating	

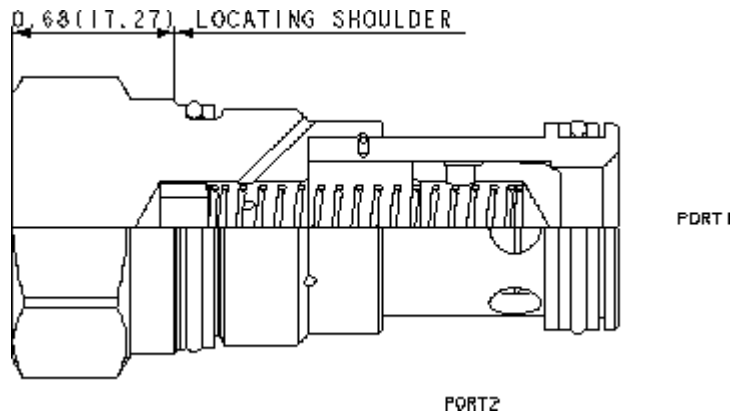

### TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-3A
Series	2
Capacity	160 L/min.
Valve Hex Size	28,6 mm
Valve Installation Torque	61 - 68 Nm
Seal kit - Cartridge	Buna: 990-203-007
Seal kit - Cartridge	Viton: 990-203-006

## OPTION SELECTION EXAMPLE: CXFBXAN

CONTROL	(X) CRACKING PRESSURE	(A) SEAL MATERIAL	(N) MATERIAL/COATING
<b>X</b> Not Adjustable	<b>A</b> 4 psi (0,3 bar)	<b>N</b> Buna-N	Standard Material/Coating
	<b>B</b> 15 psi (1 bar)	<b>V</b> Viton	<b>/AP</b> Stainless Steel, Passivated
	<b>C</b> 30 psi (2 bar)		
	<b>D</b> 50 psi (3,5 bar)		
	<b>E</b> 75 psi (5 bar)		
	<b>F</b> 100 psi (7 bar)		
	<b>Z</b> 1 psi (0,07 bar)		

### PERFORMANCE CURVES

