


**CONFIGURATION**

X	Control	Not Adjustable
A	Cracking Pressure	4 psi (0,3 bar)
N	Seal Material	Buna-N
	Material/Coating	

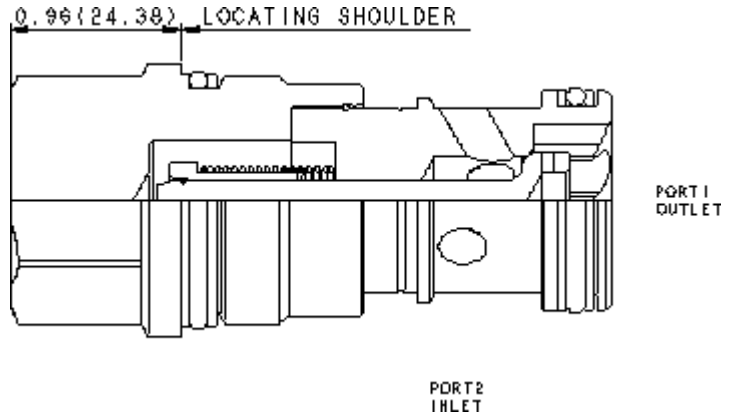

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-16A
Series	3
Capacity	240 L/min.
Maximum Operating Pressure	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	0,07 cc/min.
Valve Hex Size	31,8 mm
Valve Installation Torque	203 - 217 Nm
Model Weight	0.46 kg.
Seal kit - Cartridge	Buna: 990-016-007
Seal kit - Cartridge	EPDM: 990-016-014
Seal kit - Cartridge	Polyurethane: 990-016-002
Seal kit - Cartridge	Viton: 990-016-006
Seal kit - Cartridge	Buna: 990-016-007
Seal kit - Cartridge	EPDM: 990-016-014
Seal kit - Cartridge	Polyurethane: 990-016-002
Seal kit - Cartridge	Viton: 990-016-006

## OPTION SELECTION EXAMPLE: CXGD<sub>XAN</sub>

CONTROL	(X) CRACKING PRESSURE	(A) SEAL MATERIAL	(N) MATERIAL/COATING
<b>X</b> Not Adjustable	<b>A</b> 4 psi (0,3 bar)	<b>N</b> Buna-N	<b>/LH</b> Mild Steel, Zinc-Nickel
L activador manual	F 100 psi (7 bar)	E EPDM	/AP Stainless Steel, Passivated
	Z 1 psi (0,07 bar)	V Viton	Standard Material/Coating

### PERFORMANCE CURVES

