


CONFIGURATION

X	
C	30 psi (2 bar)
N	
	Material/Coating

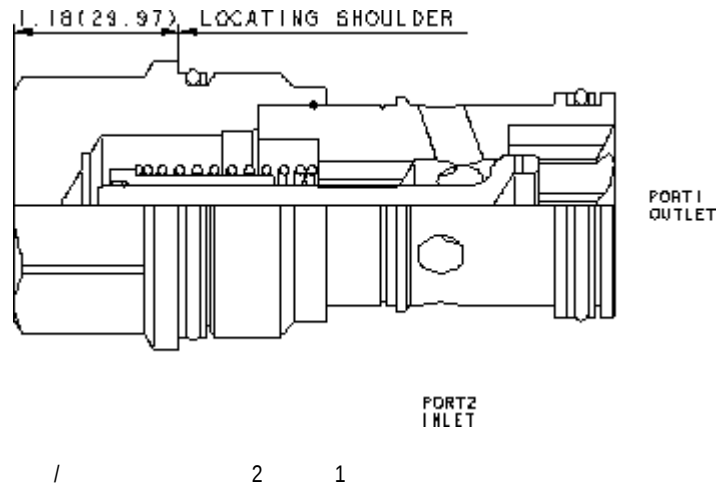

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-18A
	4
	480 L/min.
	350 bar
110 SUS (24 cSt)	0,07 cc/min.
	41,3 mm
	474 - 508 Nm
	0.93 kg.
Seal kit - Cartridge	Buna: 990-018-007
Seal kit - Cartridge	EPDM: 990-018-014
Seal kit - Cartridge	Polyurethane: 990-018-002
Seal kit - Cartridge	Viton: 990-018-006
Seal kit - Cartridge	Buna: 990-018-007
Seal kit - Cartridge	EPDM: 990-018-014
Seal kit - Cartridge	Polyurethane: 990-018-002
Seal kit - Cartridge	Viton: 990-018-006

OPTION SELECTION EXAMPLE: CXIDXCN

	(X)	(C)	(N)	MATERIAL/COATING	(/LH)
X	C 30 psi (2 bar)	N	/LH	-	
L	A 4 psi (0,3 bar)	E EPDM	/AP		
	B 15 psi (1 bar)	V		Standard Material/Coating	
	D 50 psi (3,5 bar)				
	E 75 psi (5 bar)				
	F 100 psi (7 bar)				
	Z 1 psi (0,07 bar)				

TECHNICAL FEATURES

- -
 -
 - 1 2 5000psi 350bar
 - EPDM
 - Sun
- 2 1 2 1 2 2 30%
- 1 0.07cc/min

PERFORMANCE CURVES

