


### CONFIGURATION

X	Control	Not Adjustable
C	Cracking Pressure	30 psi (2 bar)
N	Seal Material	Buna-N

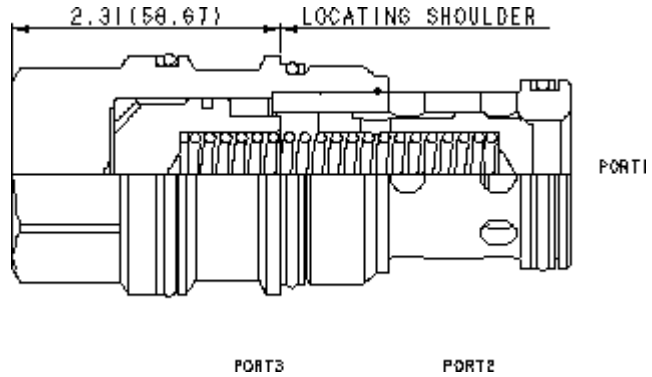

Free-flow, nose-to-side cheater check valves function as a standard 2-port check valve in a 3-port cavity with port 3 of the cartridge blocked off. These valves are useful in circuits where a check valve is required in an existing three port cavity.

### TECHNICAL DATA

Maximum Operating Pressure	5000 psi
Seal kit - Cartridge	Buna: 990-019-007
Seal kit - Cartridge	Polyurethane: 990-019-002
Seal kit - Cartridge	Viton: 990-019-006

### CONFIGURATION OPTIONS

Model Code Example: **CXJCXCN**

CONTROL	(X)	CRACKING PRESSURE	(C)	SEAL MATERIAL	(N)
X	Not Adjustable	C	30 psi (2 bar)	N	Buna-N
		A	4 psi (0,3 bar)	V	Viton
		B	15 psi (1 bar)		
		D	50 psi (3,5 bar)		
		E	75 psi (5 bar)		
		F	100 psi (7 bar)		