


CONFIGURATION

X	Control	Not Adjustable
A	Cracking Pressure	4 psi (0,3 bar)
N	Seal Material	Buna-N
	Material/Coating	

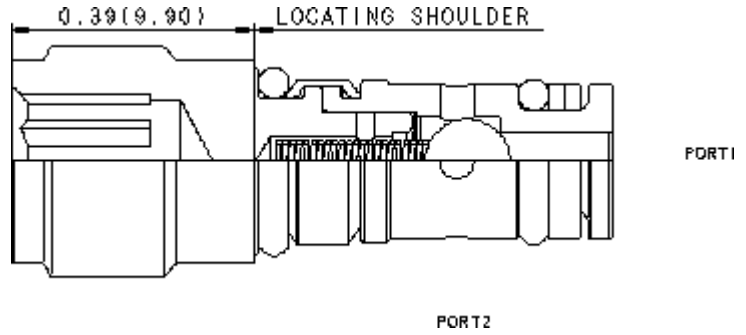

TECHNICAL DATA

Maximum Operating Pressure	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	0,07 cc/min.
Valve Internal Hex Size	5 mm
Seal kit - Cartridge	Buna: 990-382-007
Seal kit - Cartridge	EPDM: 990-382-014
Seal kit - Cartridge	Viton: 990-382-006
Seal kit - Cartridge	Buna: 990-382-007
Seal kit - Cartridge	EPDM: 990-382-014
Seal kit - Cartridge	Viton: 990-382-006

CONFIGURATION OPTIONS

Model Code Example: **CXZAXAN**

CONTROL	(X)	CRACKING PRESSURE	(A)	SEAL MATERIAL	(N)	MATERIAL/COATING	(/LH)
X	Not Adjustable	A	4 psi (0,3 bar)	N	Buna-N	/LH	Mild Steel, Zinc-Nickel
				E	EPDM	/AP	Stainless Steel, Passivated
				V	Viton		Standard Material/Coating