


**CONFIGURATION**

X	Control	Not Adjustable
A	Cracking Pressure	4 psi (0,3 bar)
N	Seal Material	Buna-N
	Material/Coating	

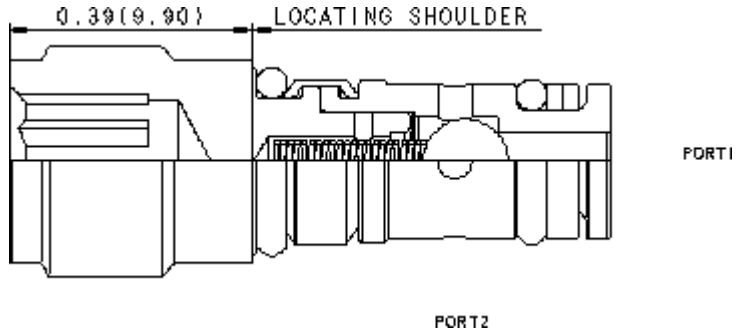

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-382A
Series	Z
Capacity	4 L/min.
Maximum Operating Pressure	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	0,07 cc/min.
Valve Internal Hex Size	5 mm
Valve Installation Torque	11 - 14 Nm
Model Weight	0.01 kg.
Seal kit - Cartridge	Buna: 990-382-007
Seal kit - Cartridge	EPDM: 990-382-014
Seal kit - Cartridge	Viton: 990-382-006
Seal kit - Cartridge	Buna: 990-382-007
Seal kit - Cartridge	EPDM: 990-382-014
Seal kit - Cartridge	Viton: 990-382-006

## OPTION SELECTION EXAMPLE: CXZAXAN

CONTROL	(X) CRACKING PRESSURE	(A) SEAL MATERIAL	(N) MATERIAL/COATING
X Not Adjustable	A 4 psi (0,3 bar)	N Buna-N	/LH Mild Steel, Zinc-Nickel
		E EPDM	/AP Stainless Steel, Passivated
		V Viton	Standard Material/Coating

### PERFORMANCE CURVES

