


**CONFIGURATION**

X	
A	4 psi (0,3 bar)
N	
Material/Coating	

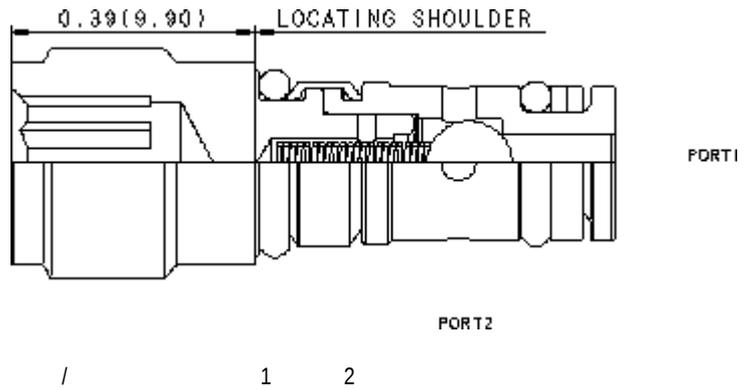

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-382A
	Z
	4 L/min.
	350 bar
110 SUS (24 cSt)	0,07 cc/min.
	5 mm
	11 - 14 Nm
	0.01 kg.
Seal kit - Cartridge	Buna: 990-382-007
Seal kit - Cartridge	EPDM: 990-382-014
Seal kit - Cartridge	Viton: 990-382-006

# OPTION SELECTION EXAMPLE: CXZAXAN

	(X)	(A)	(N)	MATERIAL/COATING	(/LH)
<b>X</b>	<b>A</b>	<b>4 psi (0,3 bar)</b>	<b>N</b>	<b>/LH</b>	<b>-</b>
	<b>B</b>	<b>15 psi (1 bar)</b>	<b>E</b>	<b>EPDM</b>	<b>/AP</b>
	<b>C</b>	<b>30 psi (2 bar)</b>	<b>V</b>		Standard Material/Coating

## TECHNICAL FEATURES

- 0.188 3/16
- EPDM
- 1 0.07cc/min
- 1 2 5000psi 350bar
- Sun

## PERFORMANCE CURVES

