


M-Control, H-Spool

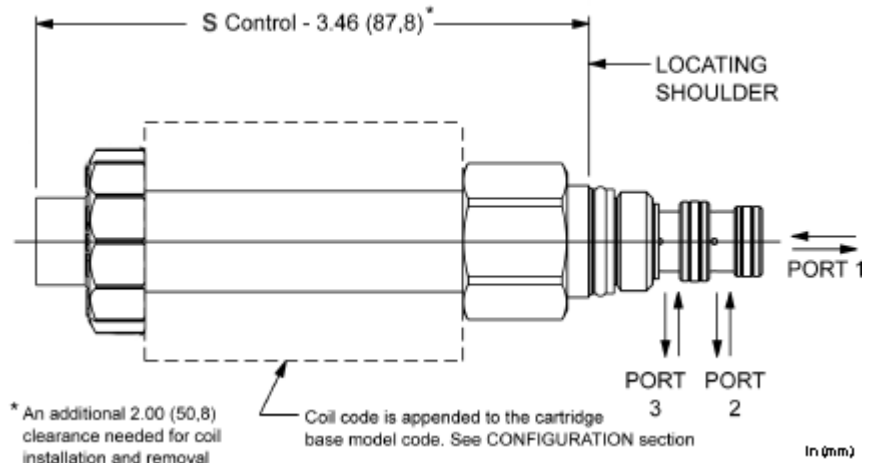

2 3

1 2 1 3

FLeX

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-9A
	P
	1 L/min.
	350 bar
110 SUS (24 cSt)	0,7 cc/min.@350 bar
	2,5 mm
	66 N/100 bar @ Port 1
	16 mm
	22,2 mm
	27 - 33 Nm
Seal kit - Cartridge	Buna: 990-009-007
Seal kit - Cartridge	Polyurethane: 990-009-002
Seal kit - Cartridge	Viton: 990-009-006
Seal kit - Cartridge	Buna: 990-009-007
Seal kit - Cartridge	Polyurethane: 990-009-002
Seal kit - Cartridge	Viton: 990-009-006

OPTION SELECTION EXAMPLE: DBAFSCN

(C)

(N)

C	N	
H	E EPDM	
	V	

TECHNICAL FEATURES

-
-
- Sun
- 1
- 5000 psi (350 bar)
-
- 10 / @5000 psi 0,7 cc/min @ 350 bar
- - 1000
- IP69K
- FLeX
-
-
-
-
- Sun /

Sun
150ms 300ms

PERFORMANCE CURVES

