


M-Control, H-Spool

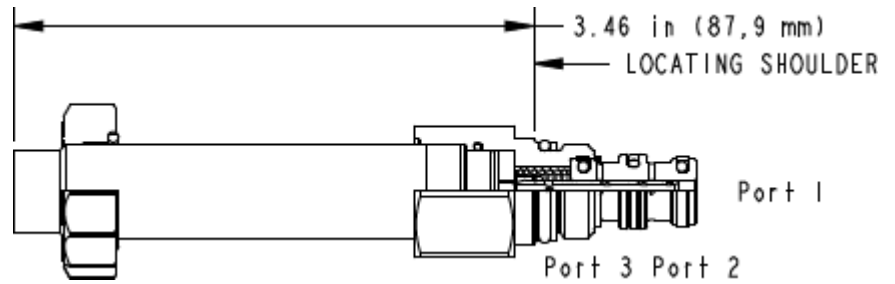

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-9A
Series	P
Capacity	1 L/min.
Maximum Operating Pressure	350 bar
Manual Override Force Requirement	66 N/100 bar @ Port 1
Manual Override Stroke	2,5 mm
Maximum Valve Leakage at 110 SUS (24 cSt)	0,7 cc/min.@350 bar
Solenoid Tube Diameter	16 mm
Valve Hex Size	22,2 mm
Valve Installation Torque	27 - 33 Nm
Seal kit - Cartridge	Buna: 990-009-007
Seal kit - Cartridge	Polyurethane: 990-009-002
Seal kit - Cartridge	Viton: 990-009-006

# OPTION SELECTION EXAMPLE: DBAFSHN

## POPPET CONFIGURATION

- H** normalmente abierto
- C** normalmente cerrado

## (H) SEAL MATERIAL

- N** Buna-N
- E** EPDM
- V** Viton

## (N) BOBINA

- No coil
- 212** DIN 43650-Form A, 12 VDC
- 224** DIN 43650-Form A, 24 VDC
- 912** Deutsch DT04-2P, 12 VDC
- 924** Deutsch DT04-2P, 24 VDC

## PERFORMANCE CURVES

