
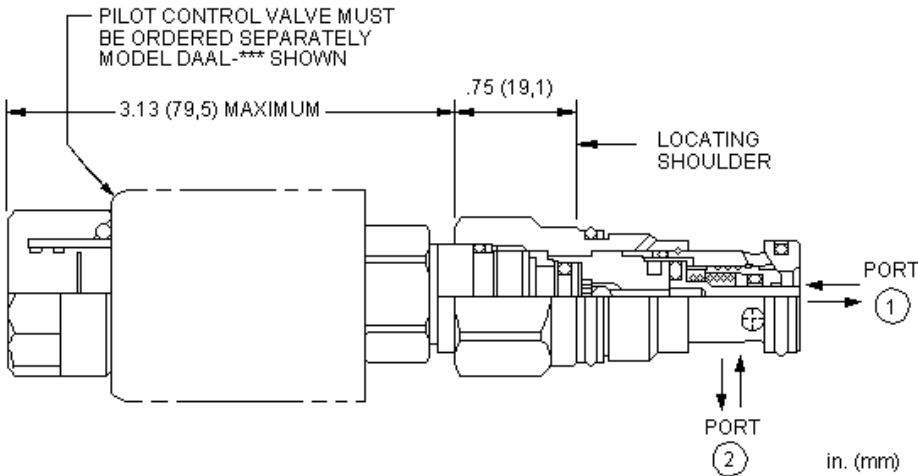


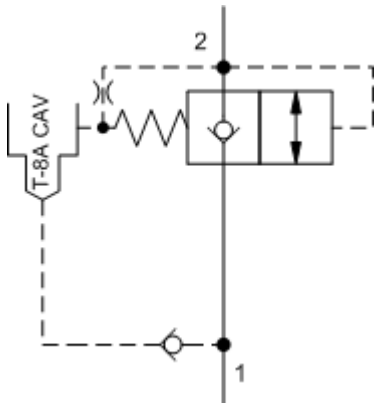


TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-13A
Series	1
Capacity	60 L/min.
Maximum Operating Pressure	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	0,7 cc/min.@350 bar
Pilot Control Cavity	T-8A
Pilot Control Valve Installation Torque	27 - 33 Nm
Response Time - Typical	see pilot control ms
Valve Hex Size	22,2 mm
Valve Installation Torque	41 - 47 Nm
Model Weight	0,20 kg
Seal kit - Cartridge	Buna: 990-310-007
Seal kit - Cartridge	EPDM: 990-310-014
Seal kit - Cartridge	Viton: 990-310-006
Seal kit - Cartridge	Buna: 990-310-007
Seal kit - Cartridge	EPDM: 990-310-014
Seal kit - Cartridge	Viton: 990-310-006

OPTION SELECTION EXAMPLE: DFCB8N

SEAL MATERIAL		(N)
N	Buna-N	
E	EPDM	
V	Viton	

PERFORMANCE CURVES

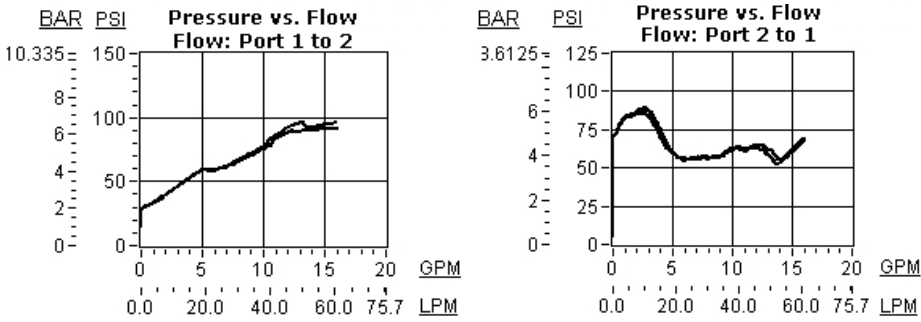

BAR

PSI

3.6125

125

6

100

4

75

2

50

0

25

0

0

Pressure vs. Flow

Flow: Port 2 to 1

0

5

10

15

20

GPM

0.0

20.0

40.0

60.0

75.7

LPM