


X-Control, C-Poppet

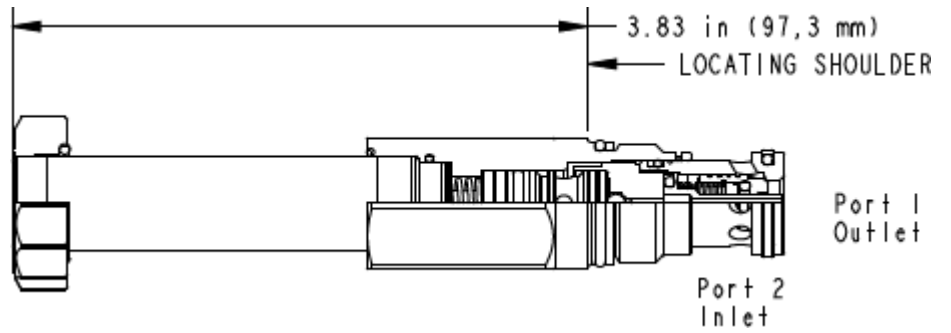

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-13A
Series	1
Capacity	60 L/min.
Maximum Operating Pressure	350 bar
Check Cracking Pressure	3,5 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	0,7 cc/min.@350 bar
Response Time - Typical	30 ms
Switching Frequency	15,000 max. cycles/hr
Solenoid Tube Diameter	16 mm
Valve Hex Size	22,2 mm
Valve Installation Torque	41 - 47 Nm
Model Weight	0.28 kg.
Seal kit - Cartridge	Buna: 990-310-007
Seal kit - Cartridge	EPDM: 990-310-014
Seal kit - Cartridge	Viton: 990-310-006

OPTION SELECTION EXAMPLE: DFCJXCN

CONTROL	(X) SPOOL CONFIGURATION	(C) SEAL MATERIAL	(N) BOBINA
X No Manual Override	C normalmente cerrado	N Buna-N	No coil
D Twist/Lock (Dual) Manual Override	H normalmente abierto	E EPDM	212 DIN 43650-Form A, 12 VDC
L Twist/Lock (Detent) Manual Override		V Viton	224 DIN 43650-Form A, 24 VDC
M activador manual			
T Twist (Momentary) Manual Override			

PERFORMANCE CURVES

