



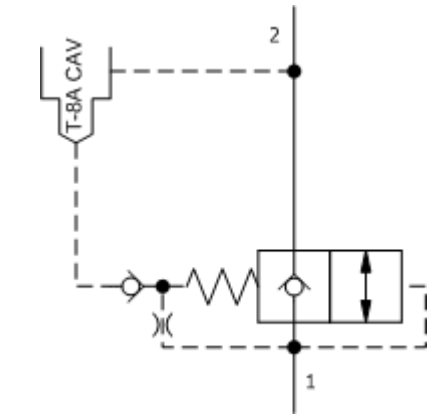

CONFIGURATION

Seal Material
Material/Coating

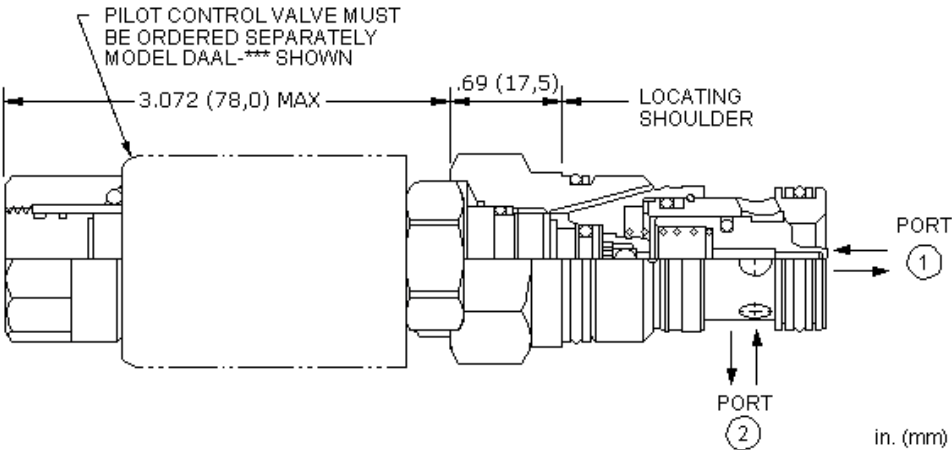

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-5A
Series	2
Capacity	120 L/min.
Maximum Operating Pressure	350 bar
Check Cracking Pressure	3,5 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	0,7 cc/min.@350 bar
Pilot Control Cavity	T-8A
Pilot Control Valve Installation Torque	27 - 33 Nm
Response Time - Typical	see pilot control ms
Valve Hex Size	28,6 mm
Valve Installation Torque	61 - 68 Nm
Model Weight	0.15 kg.
Seal kit - Cartridge	Buna: 990-203-007
Seal kit - Cartridge	Viton: 990-203-006

OPTION SELECTION EXAMPLE: DFDA8DN

SEAL MATERIAL

(V) MATERIAL/COATING

V	Viton
N	Buna-N

	Standard Material/Coating
/AP	Stainless Steel, Passivated

PERFORMANCE CURVES

