


X-Control, C-Poppet

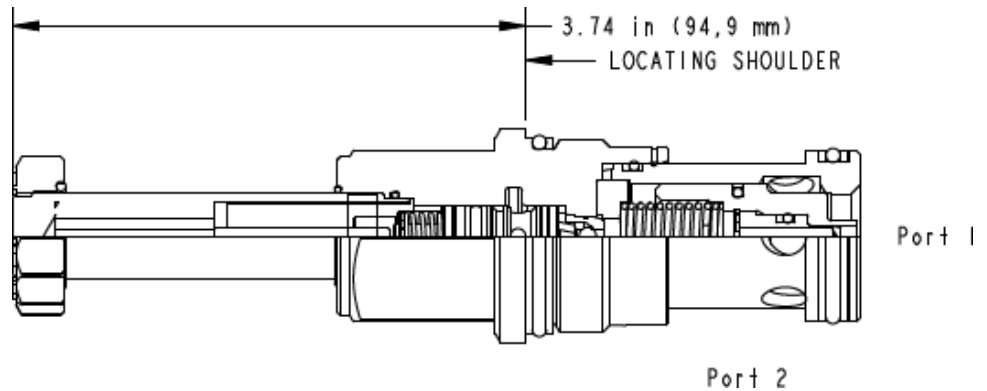

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Maximum Operating Pressure	350 bar
Check Cracking Pressure	3,5 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	0,7 cc/min.@350 bar
Response Time - Typical	30 ms
Switching Frequency	15,000 max. cycles/hr
Seal kit - Cartridge	Buna: 990-016-007
Seal kit - Cartridge	EPDM: 990-016-014
Seal kit - Cartridge	Viton: 990-016-006
Seal kit - Cartridge	Buna: 990-016-007
Seal kit - Cartridge	EPDM: 990-016-014
Seal kit - Cartridge	Viton: 990-016-006

**CONFIGURATION OPTIONS**

**Model Code Example: DFEIXCN**

CONTROL	(X)	SPOOL CONFIGURATION	(C)	SEAL MATERIAL	(N)	BOBINA
<b>X</b> No Manual Override		<b>C</b> normalmente cerrado		<b>N</b> Buna-N		No coil
<b>D</b> Twist/Lock (Dual) Manual Override		<b>H</b> normalmente abierto		<b>E</b> EPDM		
<b>L</b> Twist/Lock (Detent) Manual Override				<b>V</b> Viton		
<b>M</b> activador manual						
<b>T</b> Twist (Momentary) Manual Override						