
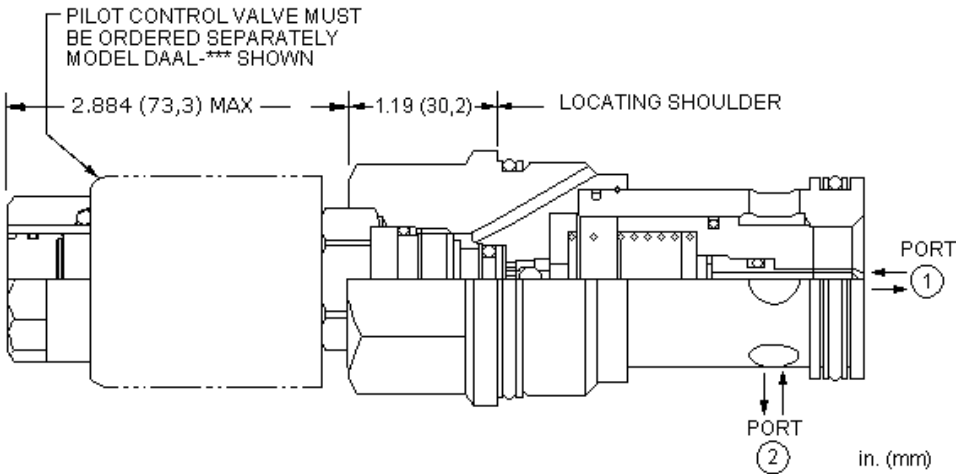


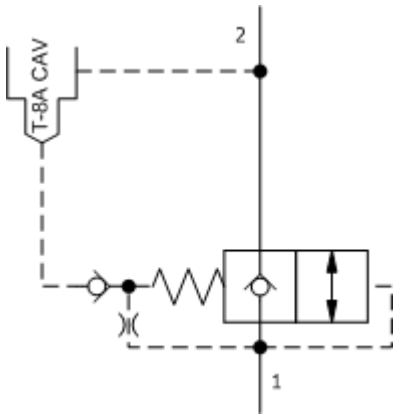

2 2 1 2 5000psi(350 bar) T-8A

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-18A
	4
	480 L/min.
	350 bar
110 SUS (24 cSt)	0,7 cc/min.@350 bar
	T-8A
	27 - 33 Nm
	41,3 mm
	474 - 508 Nm
	0,50 kg
Seal kit - Cartridge	Buna: 990-018-007
Seal kit - Cartridge	EPDM: 990-018-014
Seal kit - Cartridge	Polyurethane: 990-018-002
Seal kit - Cartridge	Viton: 990-018-006
Seal kit - Cartridge	Buna: 990-018-007
Seal kit - Cartridge	EPDM: 990-018-014
Seal kit - Cartridge	Polyurethane: 990-018-002
Seal kit - Cartridge	Viton: 990-018-006

OPTION SELECTION EXAMPLE: DFFA8N

(N) MATERIAL/COATING

N	Standard Material/Coating
E EPDM	IAP
V	

TECHNICAL FEATURES

- T-8A
- -8 T-8A
- EPDM
- Sun

PERFORMANCE CURVES

