


X-Control, C-Poppet

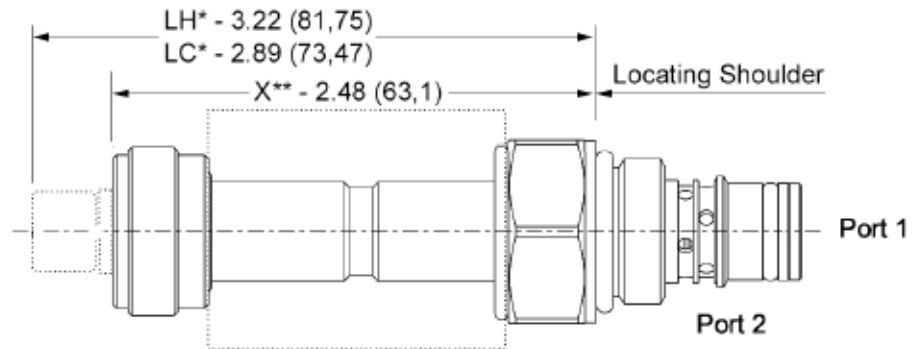

*An additional 2.00 (50.8) clearance needed for coil installation and removal

Coil code is appended to the cartridge base model code. See CONFIGURATION section. in (mm)

CARACTÉRISTIQUES NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Fuite Maximale à 24 cSt (100 SUS)	1 cc/min.
Temps de Réponse - Typique	60 ms

CONFIGURATION OPTIONS

Model Code Example: **DFTBXCN**

DISPOSITIF DE CONTRÔLE (X)	POPPET CONFIGURATION (C)	MATIÈRE DES JOINTS (N)	BOBINE
X Non Réglable	C Normalement Fermé	N Buna N	Sans bobine
L Commande Manuelle - Réglable	H Normalement Ouvert		