


X-Control, C-Poppet

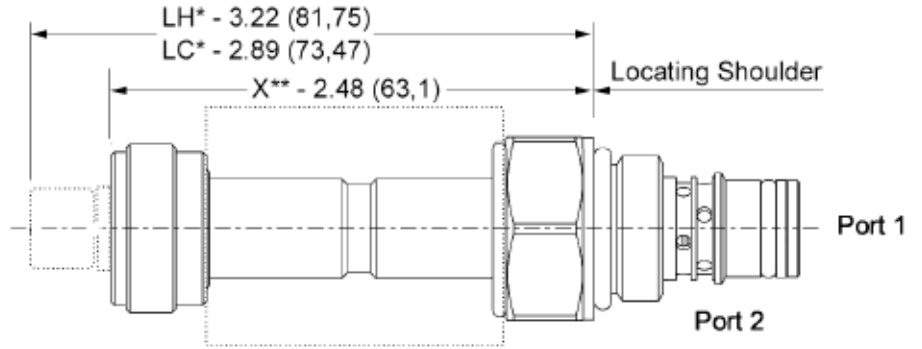

\*An additional 2.00 (50.8) clearance needed for coil installation and removal

Coil code is appended to the cartridge base model code. See CONFIGURATION section. in (mm)

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

110 SUS (24 cSt)	1 cc/min.
	60 ms

**CONFIGURATION OPTIONS**

Model Code Example: **DFTBXCN**

(X)

(C)

(N)

**X**  
L -

**C**  
H

**N**