


X-Control, C-Poppet

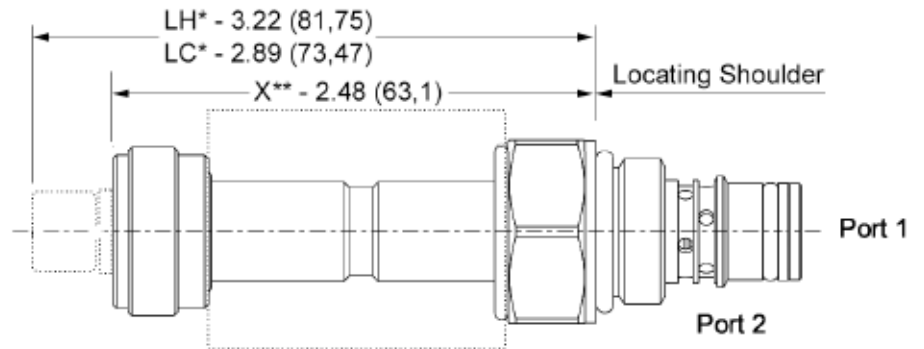

*An additional 2.00 (50.8) clearance needed for coil installation and removal

Coil code is appended to the cartridge base model code. See CONFIGURATION section. in (mm)

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	SC-08-02
Series	0C
Capacity	30 L/min.
Maximum Valve Leakage at 110 SUS (24 cSt)	1 cc/min.
Response Time - Typical	60 ms
Valve Hex Size	22,2 mm
Valve Installation Torque	19 - 22 lbf ft
Model Weight	0.13 kg.

OPTION SELECTION EXAMPLE: DFTBXCN

CONTROL	(X) POPPET CONFIGURATION	(C) SEAL MATERIAL	(N) BOBINA
X Not Adjustable	C normalmente cerrado	N Buna-N	(924D)
L Manual Override - Adjustable	H normalmente abierto		No Coil

PERFORMANCE CURVES

