


X-Control, C-Poppet

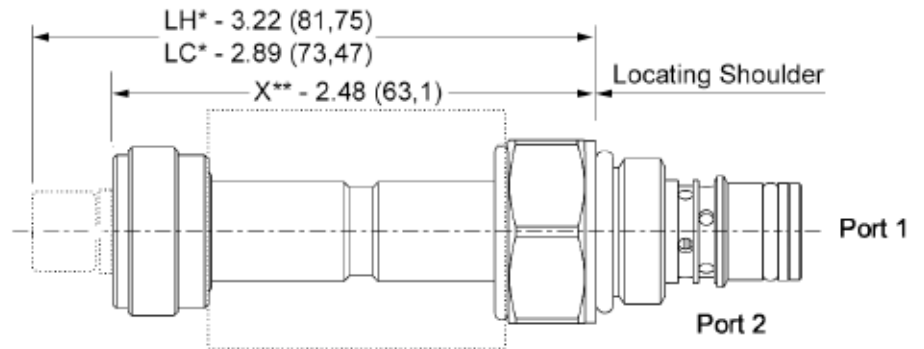

*An additional 2.00 (50.8)
clearance needed for coil
installation and removal

Coil code is appended to the
cartridge base model code.
See CONFIGURATION section. in (mm)

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	SC-08-02
Series	0C
Capacity	30 L/min.
Maximum Valve Leakage at 110 SUS (24 cSt)	1 cc/min.
Response Time - Typical	60 ms
Valve Hex Size	22,2 mm
Valve Installation Torque	26 - 30 Nm
Model Weight	0.13 kg.

OPTION SELECTION EXAMPLE: DFTBXCN

CONTROL

(X)

POPPET CONFIGURATION

(C)

SEAL MATERIAL

(N)

BOBINA

X No Manual Override

C normalmente cerrado

N Buna-N

No coil

L activador manual

H normalmente abierto

PERFORMANCE CURVES

